



OUTDOOR CATALOG 2024

www.ledlumlighting.com




CATALOG.









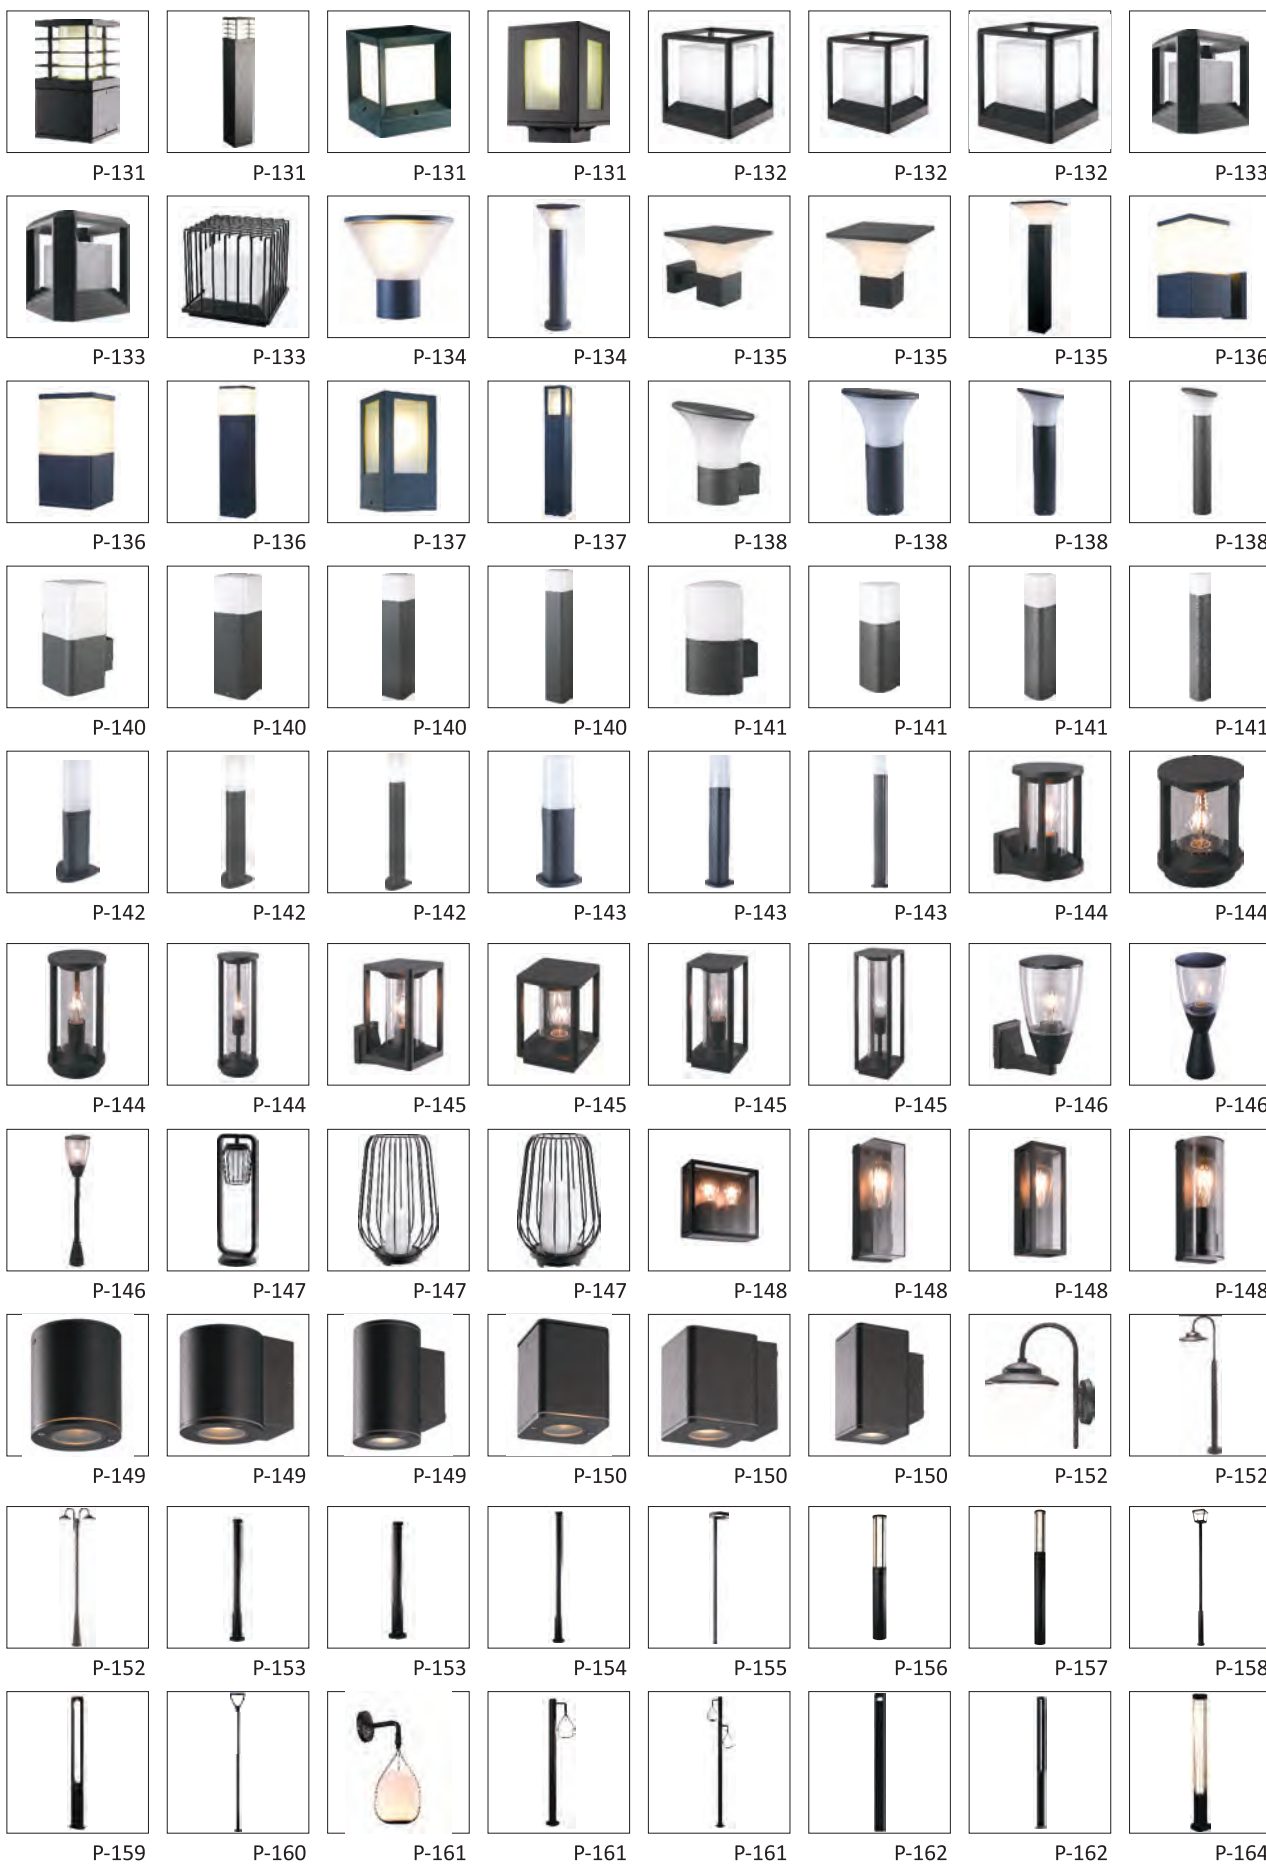







P-224



P-224



P-224



P-226



P-226



P-226



P-226



P-228



P-228



P-228




P-228




P-228

High-power LED Outdoor Wall Light Fixtures

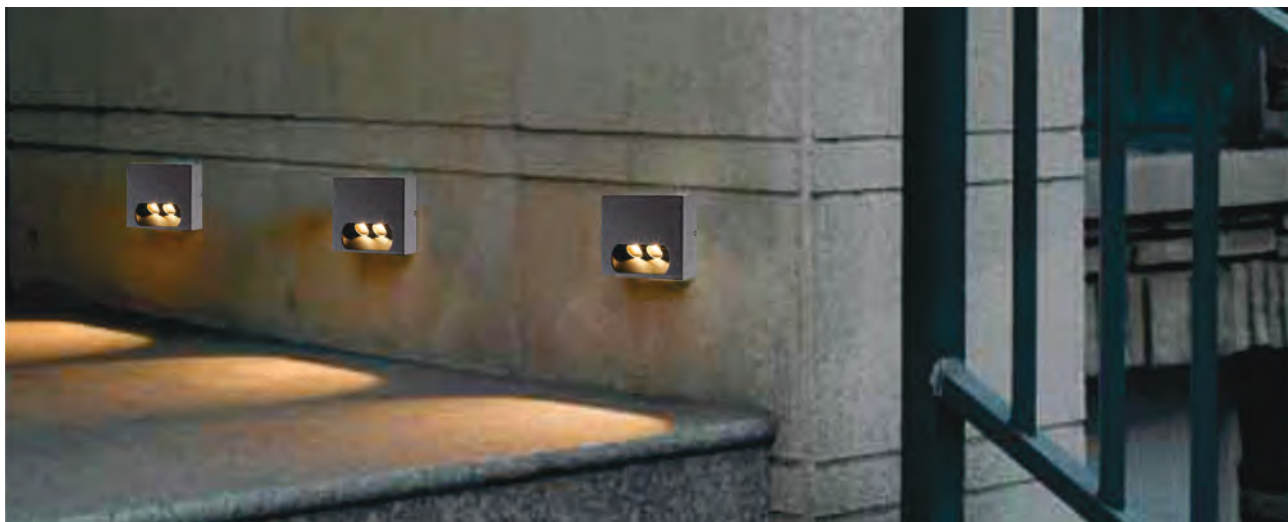


LLO-002



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x3W	95x68x32	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	64°	92lm	IP54		

LLO-003




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x1W	95x100x32	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	73°	86lm	IP54		

High-power LED Outdoor Wall Light Fixtures




LLO-001



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x1W	105x65x36	CREE	Aluminium+glass	Dark Grey	3000K/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	53°	220lm/240lm	IP54		

LLO-011




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x1W	74x74x52	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	35°	179lm	IP54		

High-power LED Outdoor Wall Light Fixtures




High-power LED Outdoor Wall Light Fixtures

LLO-005




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x3W	80x50x78	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	81°	121lm	IP54		

LLO-006



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	150x50x78	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5° /85°	162lm	IP54		

LLO-006A



Watt	Dimension(mm)	LED chip	Material	Material	CCT
2x3W	150x50x78	CREE	Aluminum	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	16° /16°	82lm	IP54		

LED Outdoor Wall Light

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs




36V
270mA


100-240V
50-60Hz



High-power LED Outdoor Wall Light Fixtures

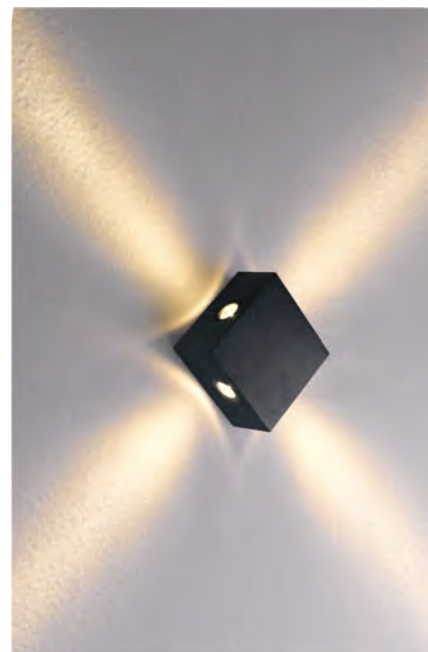


LLO-013



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x1W	100x100x52	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	11°x4	179lm	IP54		

LLO-035




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x1W	Ø100x52	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	11°x4	179lm	IP54		

High-power LED Outdoor Wall Light Fixtures




LLO-007



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x12W	138x132x100	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	846lm	IP54		


LLO-007A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x12W	220x132x100	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	1577lm	IP54		


High-power LED Outdoor Wall Light Fixtures

LLO-008




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	116.5x120x121	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	31°	512lm	IP54		

LLO-009






Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x6W	121x120x116.5	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	31°	935lm	IP54		

LLO-099D




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x6W	240x106x94	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	73°	725lm	IP54		

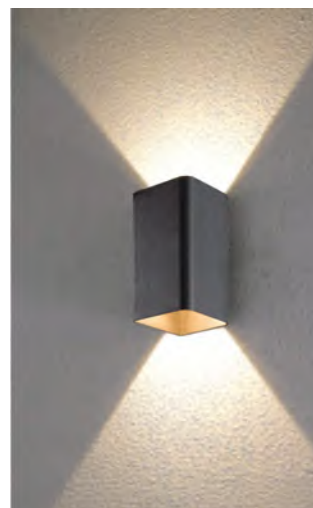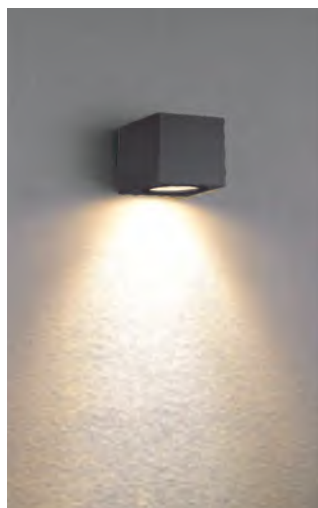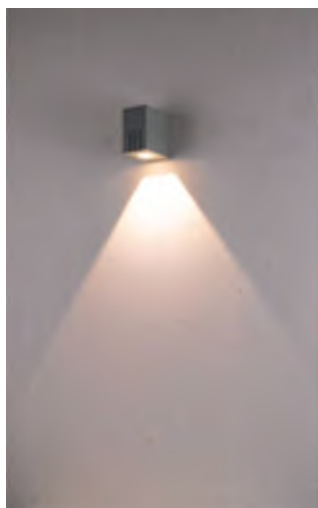


High-power LED Outdoor Wall Light Fixtures

LLO-099B




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x12W	133x182x90	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	846lm	IP54		

LLO-099C




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x12W	133x220x90	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	1577lm	IP54		

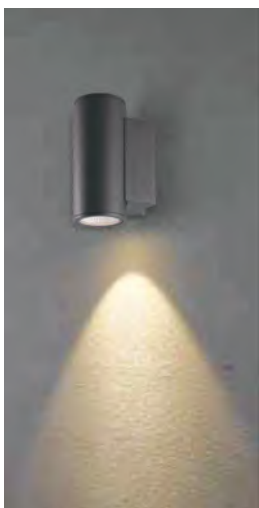

High-power LED Outdoor Wall Light Fixtures





LLO-099E



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x6W	240x108x120	CREE	Aluminium+ glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	73°	725lm	IP54		

LLO-015



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x4W	90x90x110	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	22°/90°	404lm	IP54		

NARROW/WIDE BEAM


LED Outdoor Wall Light

Control different scenes, flexibly compatible
with various spaces


A variety of specifications to meet individual needs



High-power LED Outdoor Wall Light Fixtures

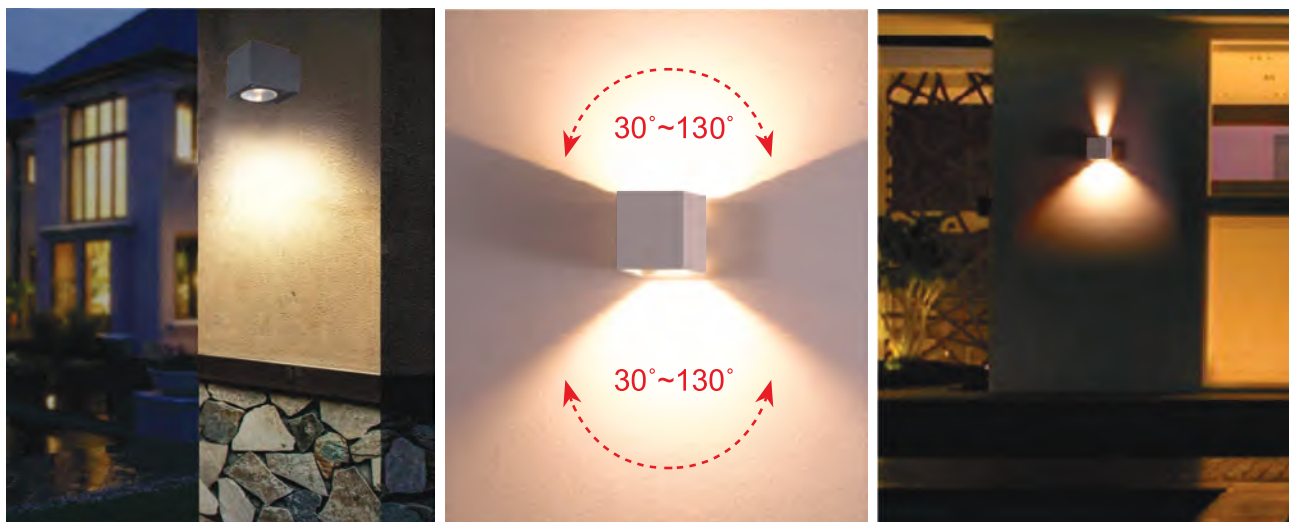


LLO-016




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x7W	130x90x120	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	21°	1208lm	IP54		

LLO-017



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	92x90x120	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	21°	541lm	IP54		

LLO-089




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x5W	119x110x105	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	30° -130°	883lm	IP54		

High-power LED Outdoor Wall Light Fixtures




LLO-084



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x3W	88x65x40	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	101°	85lm	IP54		

LLO-085




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x4W	125x90x43	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	50°	320lm	IP54		

High-power LED Outdoor Wall Light Fixtures




High-power LED Outdoor Wall Light Fixtures

LLO-031




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x7W	135x135x96	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	18°	1153lm	IP54		

LLO-032




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	100x135x96	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	18°	540lm	IP54		

LLO-033




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3x1W	85x106x84	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	24°	211lm	IP54		

LLO-034




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6x1W	110x108x84	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	25°	368lm	IP54		

High-power LED Outdoor Wall Light Fixtures

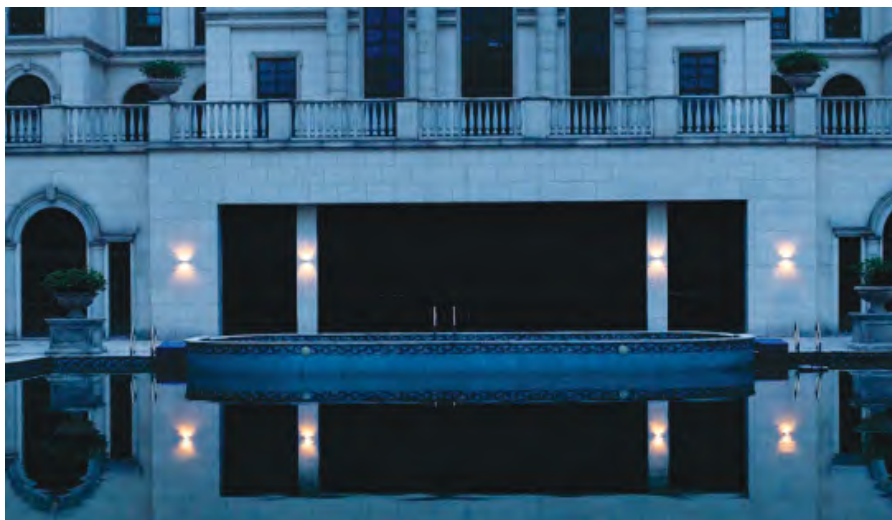


LLO-086



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x3W	80x75x66	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	84°	85lm	IP54		


LLO-087



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	80x141x66	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	87°	160lm	IP54		


High-power LED Outdoor Wall Light Fixtures

LLO-090




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x7W	145x82x62	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	72°	1116lm	IP54		

LLO-091




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	95x82x62	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	72°	577lm	IP54		

LLO-092



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x4W	108x68x90	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	565lm	IP54		

LLO-093




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x4W	70x68x90	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	38°	273lm	IP54		

High-power LED Outdoor Wall Light Fixtures




LLO-096



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	125x125x63	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	108°	389lm	IP54		

LLO-098




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	109x173x63	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15° / 78°	160lm	IP54		

High-power LED Outdoor Wall Light Fixtures




LLO-099G



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6x1W	231x77x48	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	28°	724lm	IP54		

LLO-099F



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5x2W	185x156x45	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	26°	724lm	IP54		



100-240V
50-60Hz

CREE

CE

RoHS
COMPLIANT

REACH



The background of the entire page is a light gray color. Overlaid on this background is a pattern of numerous black circles of varying sizes. Each black circle is surrounded by a soft, glowing yellow-orange halo, creating a bokeh or light effect. The circles are scattered across the page, with some appearing larger and more prominent than others.

LED Outdoor Wall Light

Control different scenes, flexibly compatible
with various spaces

A variety of specifications to meet individual needs

High-power LED Outdoor Wall Light Fixtures

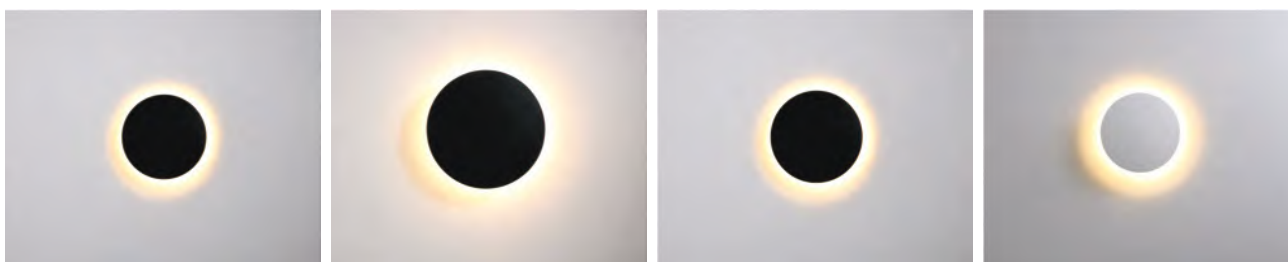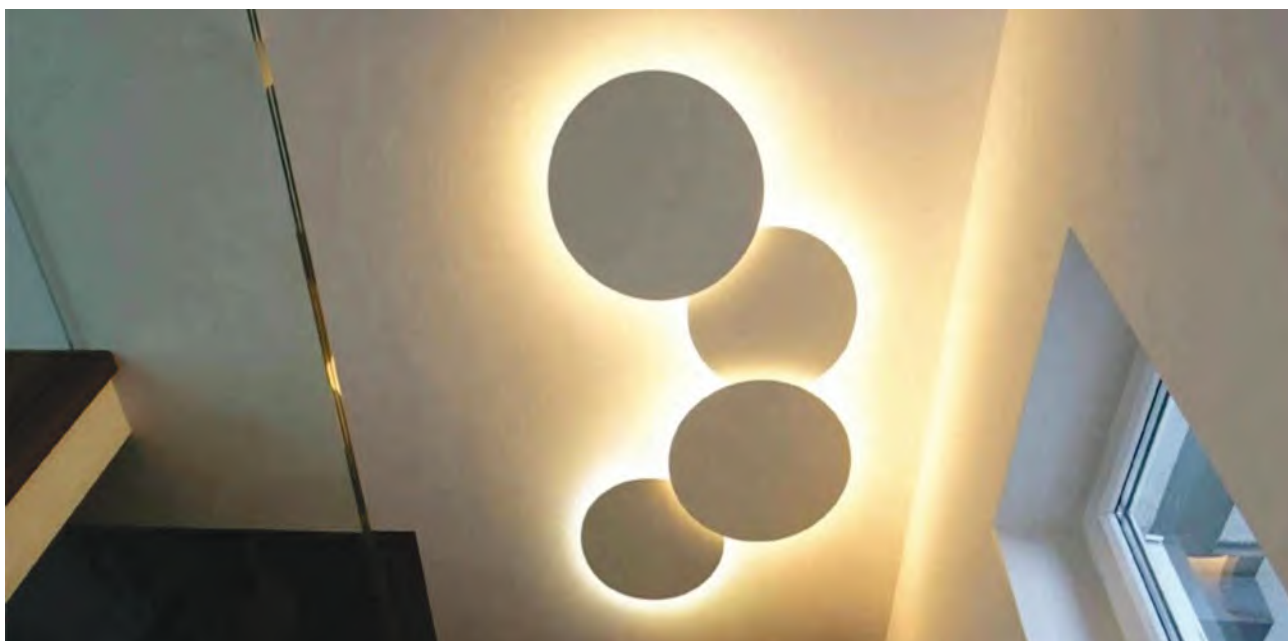


LLO-094A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	135x42	EPISTAR SMD2835	Aluminium	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	360°	560lm	IP54		

LLO-095A




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	180x42	EPISTAR SMD2835	Aluminium	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	360°	840lm	IP54		

High-power LED Outdoor Wall Light Fixtures




High-power LED Outdoor Wall Light Fixtures

LLO-099J




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	Ø90x160	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	25°	140lm/w	IP65		

LLO-099K




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x6W	Ø90x220	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	25°	140lm/w	IP65		

LLO-099L



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	Ø90x160	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	25°	140lm/w	IP65		


LLO-099M



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x12W	Ø90x220	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	25°	140lm/w	IP65		


LED Outdoor Wall Light Light Fixtures

LLO-0990




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	120x61x240	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	610lm	IP65		

LLO-099N




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	120x61x157	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	305lm	IP65		

LLO-099P




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	172x52x141	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	127°	652lm	IP65		

LLO-099R



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
11W	210x46x210	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	202°	322lm	IP65		

LLO-099Q




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	215x128x183	CREE	Aluminium+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	720lm	IP65		

LED Outdoor SMD Wall Light Fixtures



LLO-099T



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	205 x 111 x 60	CREE LED	Aluminium/Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	57°	598lm	IP54		


100-240V
50/60Hz



LED Outdoor SMD Wall Light Fixture




LLO-103




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	230x72x56	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Luminous Flux	IP			
≥80	275lm	IP65			

LLO-027



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	200x69x103	OSRAM	Die-cast Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	350°	364lm	IP54		

LLO-028




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	219x55x169	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Luminous Flux	IP			
≥80	621lm	IP54			

LED Outdoor SMD Wall Light Fixtures




LLO-102



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	240x120x45.5	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Luminous Flux	IP			
≥80	450lm	IP65			

LLO-099H




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
11W	200x55	EVERLIGHT AC LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	114°	872lm	IP54		

LED Outdoor SMD Wall Light Fixtures




LLO-079



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	185x122x170	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	465lm	IP54		

LLO-078




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	210x60x43	OSRAM	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	114°	310lm	IP54		

LED Outdoor SMD Wall Light Fixtures




LLO-074



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	161x100x98	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	388lm	IP54		

LLO-073




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	242x239x149	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	754lm	IP54		


100-240V
50-60Hz

EPISTAR

LED Outdoor Wall Fixtures

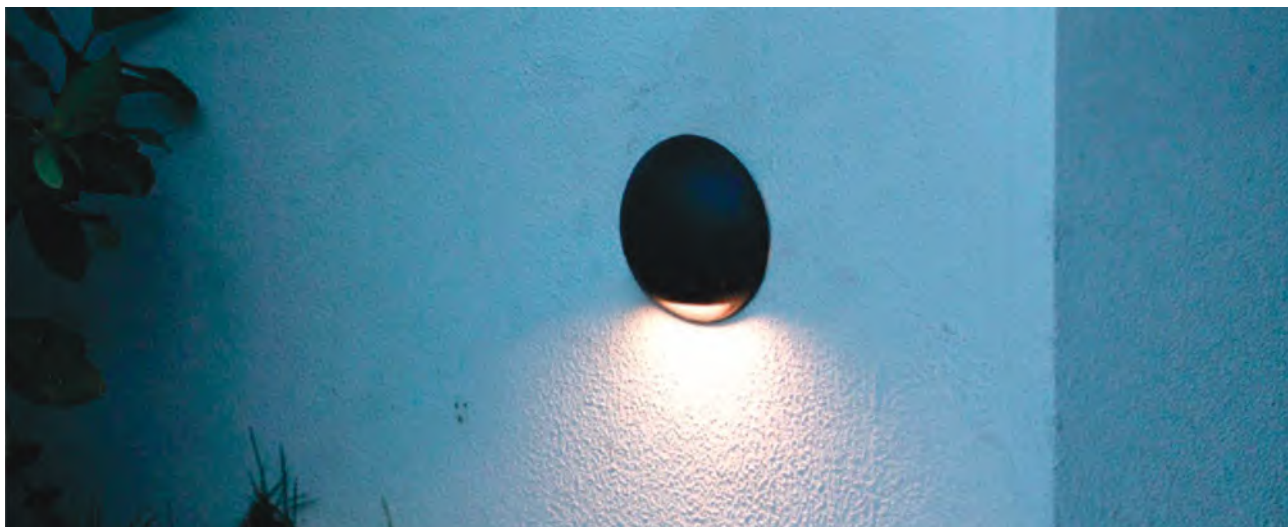


LLO-079N




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	180x88x130	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	600lm	IP54		

LLO-079E




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	120x37	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	72°	117lm	IP65		

LLO-079F




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	120x37	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	72°	176lm	IP65		

LED Outdoor SMD Wall Light Fixtures

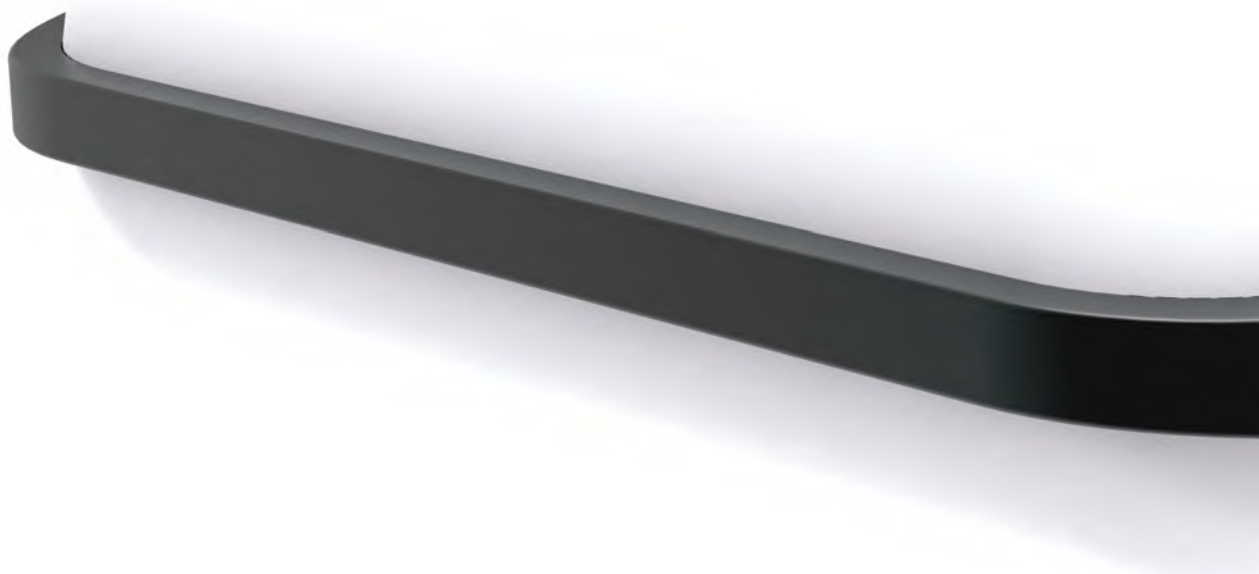


LLO-079A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	222x118x65.5	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	127°	1081lm	IP54		

LLO-079B




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	266x106x76	OSRAM	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	121°	1202lm	IP54		

100-240V
50-60Hz

EPISTAR **OSRAM** 


LED Outdoor Wall Light Light Fixtures

LLO-079G




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	112x112x35	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	77°	216lm	IP65		

LLO-079H




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	201x69x286	SMD-EVERLIGHT	Aluminium+ glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	113°	662lm	IP54		

LLO-079I



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
16W	183x130x183	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	960lm	IP65		


LLO-079J



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
16W	230x55x230	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	960lm	IP65		


LED Outdoor Wall Light Light Fixtures

LLO-079K




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	150x105x150	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP54		

LLO-079L



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	200x105x200	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	1080lm	IP54		

LLO-079M




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	150x105x280	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	1080lm	IP54		




EPISTAR

LED Outdoor Wall Light Light Fixtures


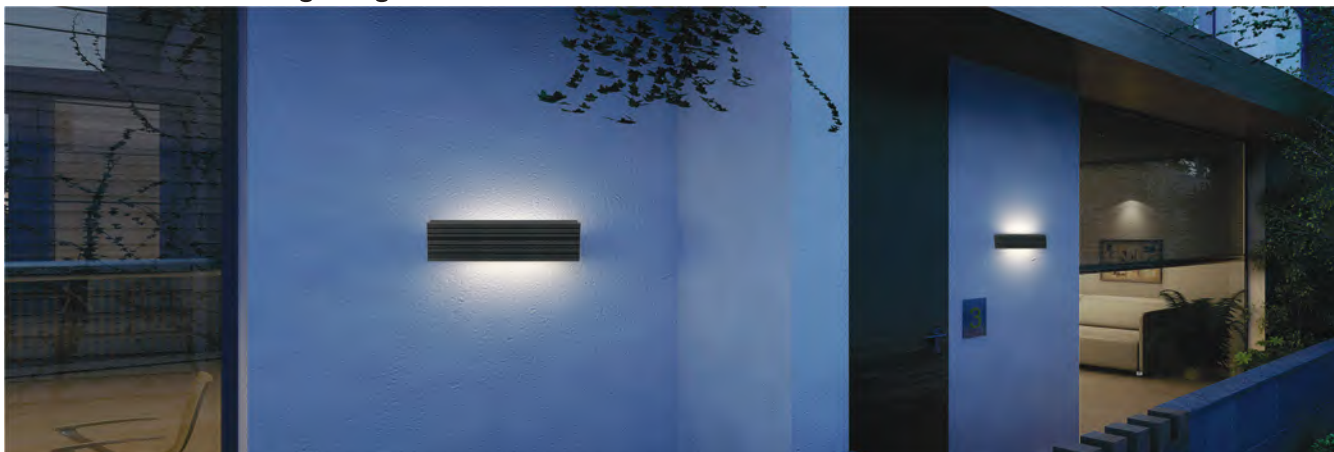


LLO-079X



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	95x37x600	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	78°	556lm	IP65		

LLO-079Y




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	95x37x1000	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	78°	847lm	IP65		

LED Outdoor Wall Light Light Fixtures




LLO-079Z

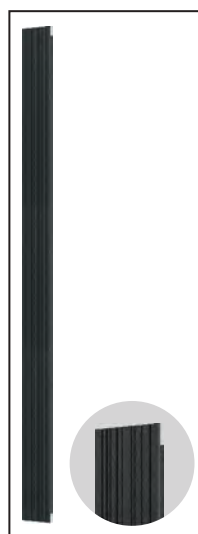


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
26W	95x37x1200	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	78°	1079lm	IP65		

LLO-0790




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	75x45x530	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	/	IP54		

LED Outdoor Wall Light Light Fixtures

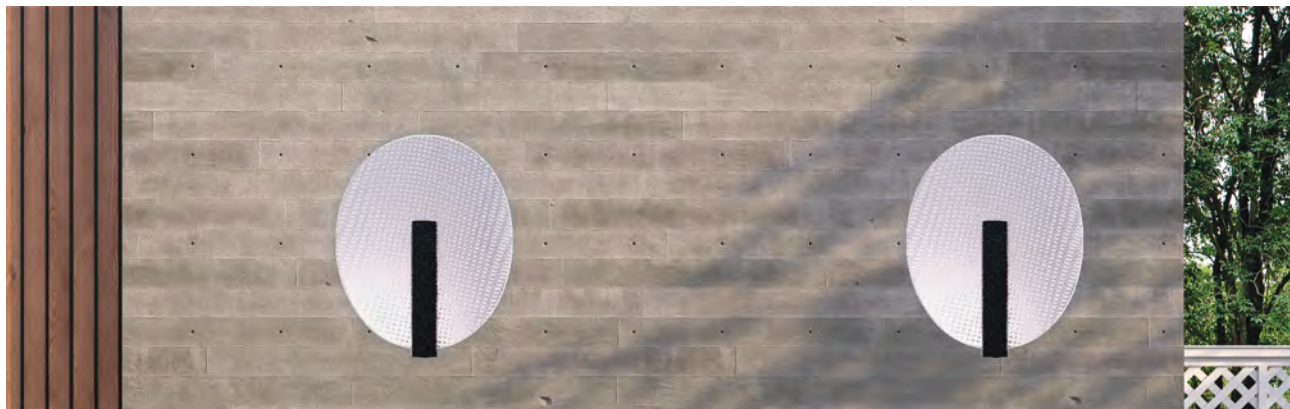


LLO-079V



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	230X324x106	SMD LED	Aluminium /PMMA	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	268°	296lm	IP54		

LLO-079T

CASTING WITH GLASS




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	202x200xH185	/	Aluminium	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	180°	612.5lm	IP65		



220-240V
50/60Hz


LED Outdoor SMD Wall Light Fixtures

LLO-094



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	258x72x41	Philips-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	74°	360lm	IP65		

LLO-095




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	180x45x30	Philips-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	233lm	IP65		

LLO-100



10xLED




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	90x38x60	EVERLIGHT	Aluminium+pc	Dark Grey	3000K/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	98°	130lm/140lm	IP54		

LLO-101



18xLED




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3.6W	150x38x70	EVERLIGHT	Aluminium+pc	Dark Grey	3000K/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	98°	234lm/252lm	IP54		


200-240V
50Hz

PHILIPS **EVERLIGHT**

LED Outdoor SMD Wall Light Fixtures

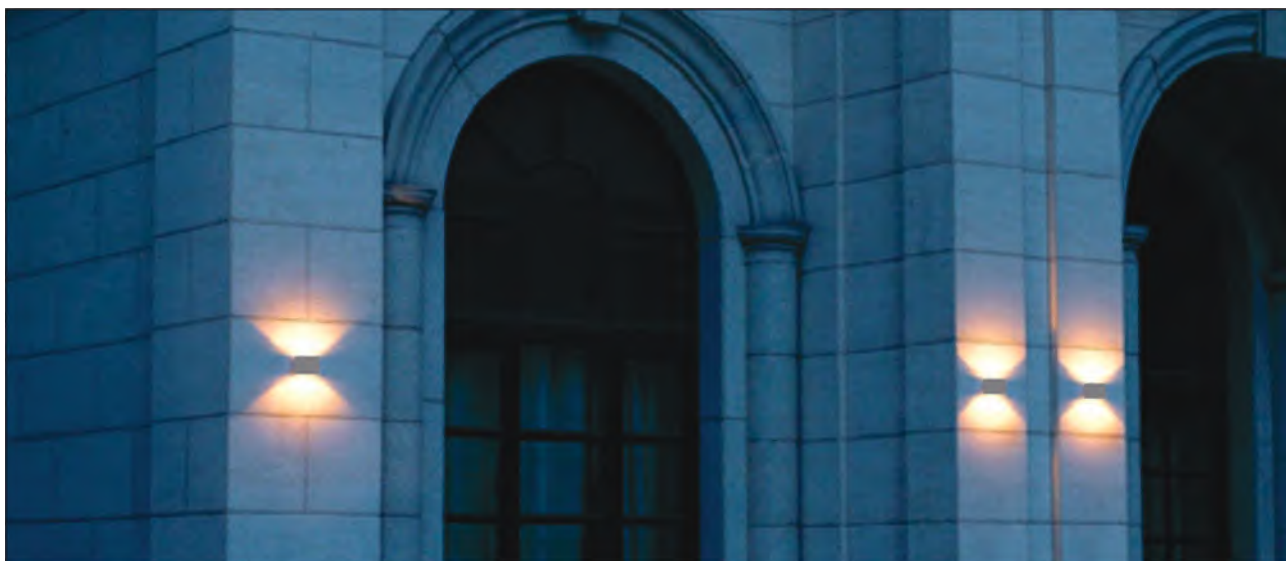


LLO-104




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	82x82x58	Philips-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	93°	218lm	IP54		

LLO-105




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	122x82x59	Philips-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	118°	261lm	IP54		

LED Outdoor Step Light Fixtures-surface

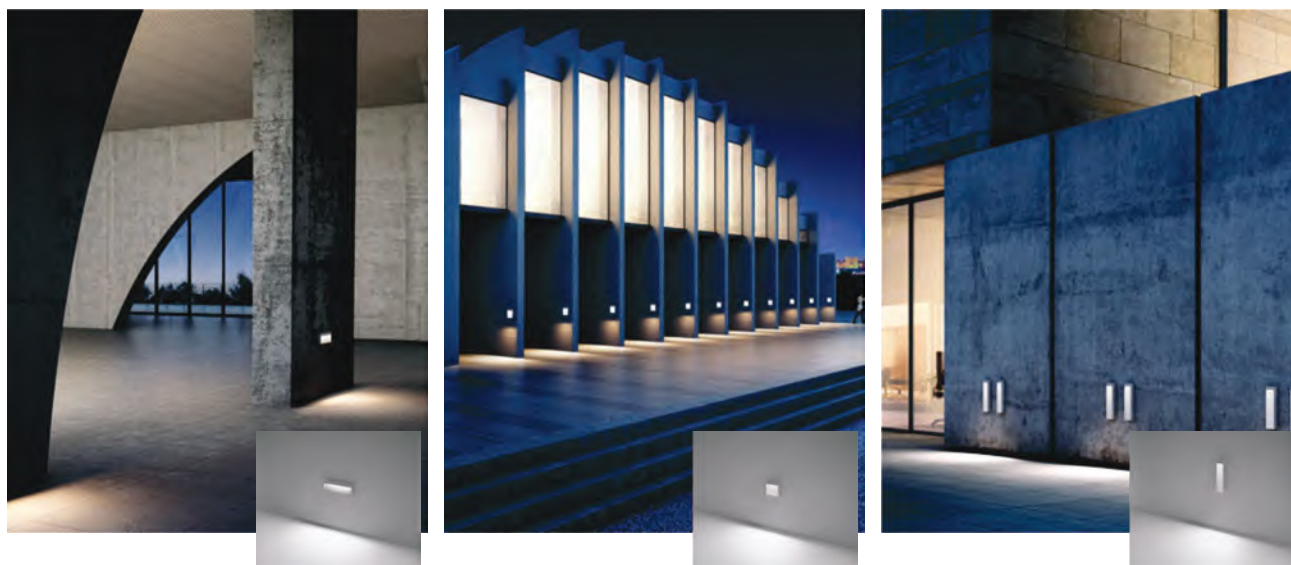


LLO-152




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4W	95x95x31	PHILIPS-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	33°	185lm	IP65		

LLO-153



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	250x95x31	PHILIPS-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	47°	487lm	IP65		

LLO-154




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	250x65x31	PHILIPS-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	53°	250lm	IP65		

220-240V
50-60Hz

PHILIPS


LED Outdoor Step Light Fixtures-surface

LLO-159K




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	110x22	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP54		

LLO-159L




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	160x30	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	360lm	IP54		

LLO-159M



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	105x22x105	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP54		


LLO-159N



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	160x30x160	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	360lm	IP54		


LED Outdoor Wall Light

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs




LED Outdoor Step Light Fixtures-surface

LLO-159H




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	128x30	EPISTAR	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	120lm	IP65		

LLO-159I



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	210x30x85	EPISTAR	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP65		

LLO-159J




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	210x30x85	EPISTAR	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	300lm	IP65		




LED Outdoor Step Light Fixtures-surface

LLO-1590




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	155x37x75	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP65		

LLO-159P



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	240x37x75	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	300lm	IP65		

LLO-159Q




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	250x100x46	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	69°	192lm	IP65		



EPISTAR


LED Outdoor Surface Light Fixtures

LLO-059H




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	190x75	EPISTAR SMD	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	580lm	IP65		

LLO-059I



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	245x75	EPISTAR SMD	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	970lm	IP65		


LLO-059J



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	310x75	EPISTAR SMD	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	1300lm	IP65		



LED Outdoor Surface Light Fixtures

LLO-059K




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	300x300x47	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	123°	1464lm	IP65		

LLO-052



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	300x70x53	EVERLIGHT	Die-cast Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	127°	350lm	IP65		

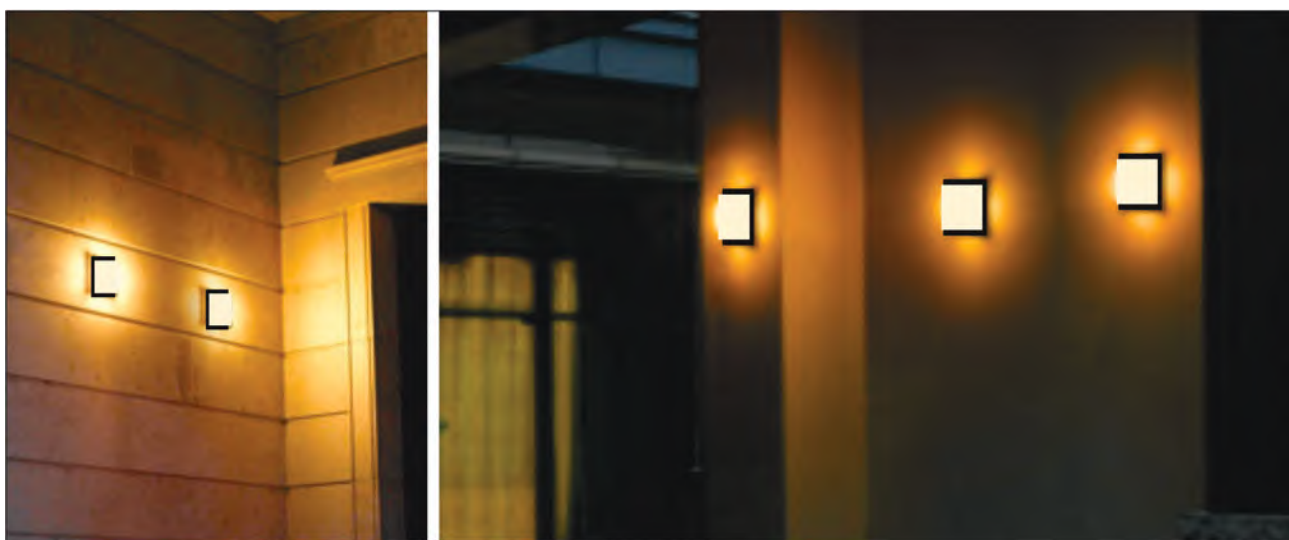


220-240V
50-60Hz


100-130V
50-60Hz

EVERLIGHT

LED Outdoor Surface Light Fixtures

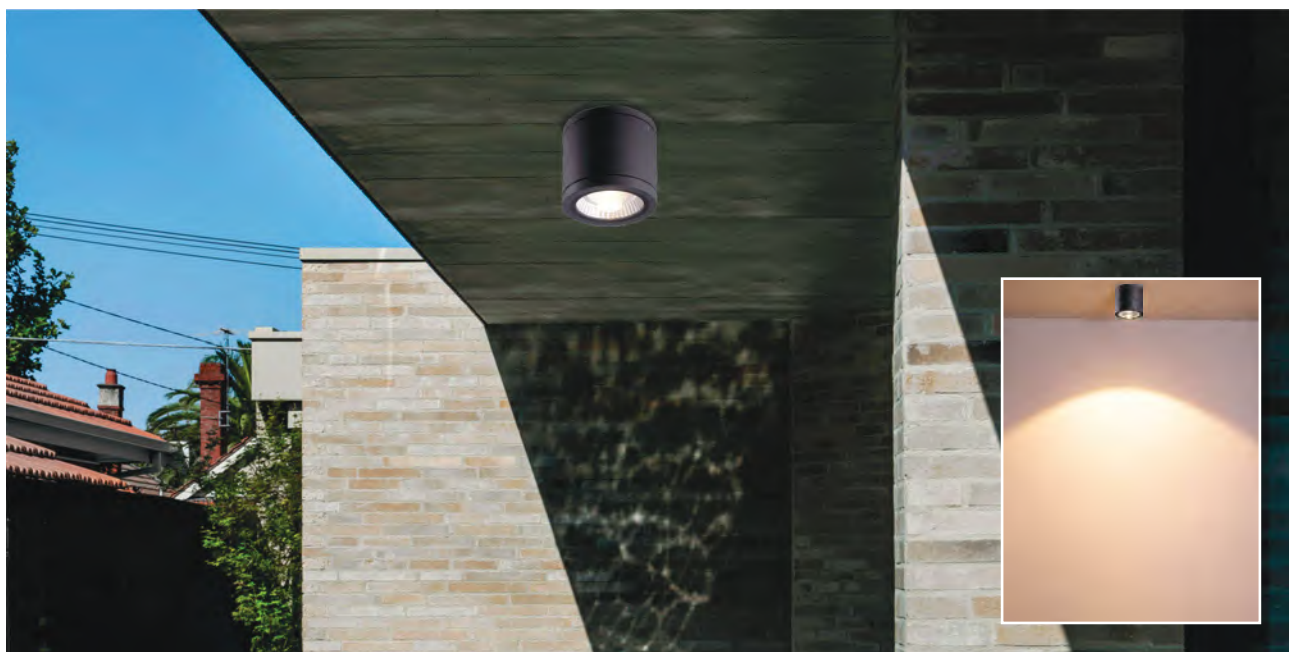


LLO-043




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	140x145	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	46°	1429lm	IP54		

LLO-045




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	95x90	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	17°	581lm	IP54		

LED Outdoor Surface Light Fixtures

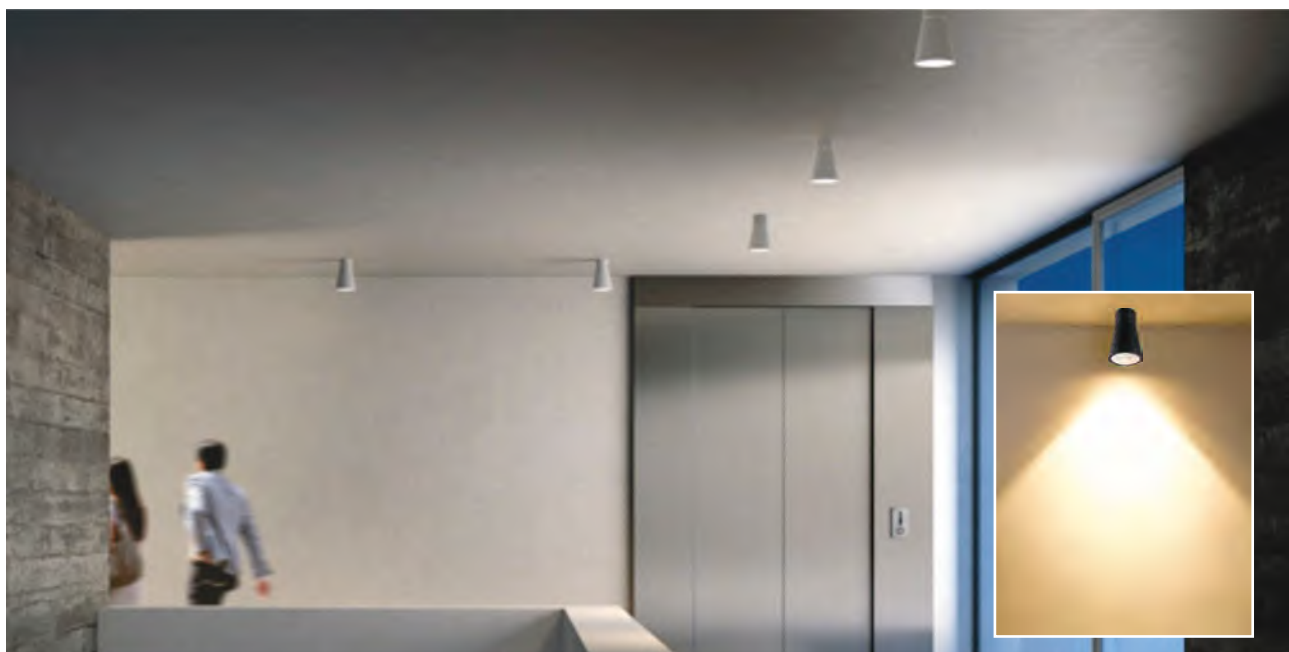


LLO-047



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	205x130	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	55°	854lm	IP65		

LLO-053



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x12W	90x137	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	846lm	IP54		

100-240V
50-60Hz


220-240V
50-60Hz



LED Outdoor Surface Light Fixtures




LLO-042



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	140x100	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	46°	846lm	IP54		

LLO-046




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	90x94	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	23°	502lm	IP54		

LED Outdoor Surface Light Fixtures




LLO-059




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	52x10	DOB	Aluminium	Black/ White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	450-500lm	IP54		

LLO-059A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	100x10	DOB	Aluminium	Black/ White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	900-1000lm	IP54		

LLO-059C




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	50x50x10	DOB	Aluminium	Black/ White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	450-500lm	IP54		

LED Outdoor Surface Light Fixtures




LLO-048



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	90x90x102	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	43°	707lm	IP54		


LLO-054



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x7W	260x260x74	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	28°	1859lm	IP54		


Hi-power LED Surface Wall Light Fixtures

LLO-059D




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	65x45	Lumens/ DOB	Aluminium	Dark Grey/White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>90	35°	430lm	IP54		

LLO-059E




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	80x45	Lumens/ DOB	Aluminium	Dark Grey/White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>90	35°	865lm	IP54		

LLO-059F



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	95x55	Lumens	Aluminium	Dark Grey/White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>90	30°	1198lm	IP54		

LLO-059G



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
30W	120x62	Lumens	Aluminium	Dark Grey/White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>90	50°	2281lm	IP54		

120-240V
50-60Hz


DOB
no driver



LED Outdoor White Body/Grey Body Wall Light Fixtures




LLO-130



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	180x118	OSRAM	Aluminium	White	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	17°	630lm	IP65		

LLO-131




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3x2W	Ø107x85	Ø75	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	5°	/	540-600lm	IP54	

LED Outdoor White Body/Grey Body Wall Light Fixtures




LLO-139C




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	55x45x60	CREE	Aluminium	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	180-200lm	IP65		

LLO-139D



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4W	85x85x57	CREE XTE	Die-casting Aluminium+Pc	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	30°	240lm	IP65		


LLO-139E



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1W	55x45x60	CREE	Aluminium	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	70-80lm	IP54		


LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-139F




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	115x105x60	Bridgelux	Aluminium+pc	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	540-600lm	IP54		

LLO-139G



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x1W	40x50x40	Bridgelux	Aluminium	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	180-200lm	IP54		

LLO-139H



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1W	40x50x40	Bridgelux	Aluminum	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	90-100lm	IP54		

LLO-139I




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x2W	70x80x70	Bridgelux	Aluminum	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	180-200lm	IP54		

LLO-139J




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x2W	70x80x70	Bridgelux	Aluminum	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	360-400lm	IP54		

LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

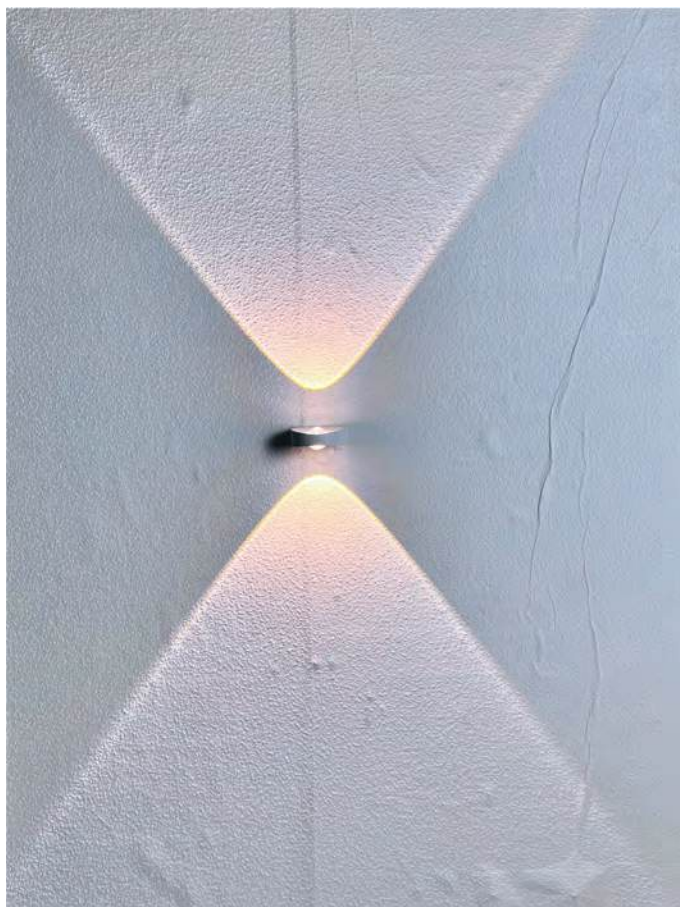


LLO-139S



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	70x65x28	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54


LLO-139T



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	35x50	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54

LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-139U



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	40x40x50	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54

LLO-139V





Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	43x59	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54





LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-139K




Watt	Dimension(mm)	LED chip	Material	Body color
4x3W	190x91x65	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	≥80	60°	1080-1200lm	IP54

LLO-139M



Watt	Dimension(mm)	LED chip	Material	Body color
2x3W	98x92x70	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	≥80	60°	540-600lm	IP54

LLO-139N





Watt	Dimension(mm)	LED chip	Material	Body color
2x5W	127x137x90	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	≥80	60°	900-1000lm	IP54





LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-139O




Watt	Dimension(mm)	LED chip	Material	Body color
2x3+2W	150x80x55	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	720-800lm	IP54

LLO-139P




Watt	Dimension(mm)	LED chip	Material	Body color
2x5+2W	200x110x60	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	1080-1200lm	IP54

LLO-139Q



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W+1W	97x50x54	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	270-300lm	IP54


LLO-139R



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W+1W	97x54x30	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	270-300lm	IP54


LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-139W




Watt	Dimension(mm)	LED chip	Material	Body color
4x1W	45x45xh50	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	360-400lm	IP54

LLO-139X




Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	35x35xh50	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54

LLO-139Y



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	25x25xh70	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54

LLO-139Z





Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	35x35xh83	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54

LED OUTDOOR PATTERN LIGHT SERIES

LLO-132


DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	35x35x50	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	180-200lm	IP54		

LLO-133


DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	42x40	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	180-200lm	IP54		

LLO-134


DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1W	42x40	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	90-100lm	IP54		

LLO-135


DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	55x45x60	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	180-200lm	IP54		

LLO-136

DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
4W	70x50x70	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	360-400lm	IP54		

LED OUTDOOR PATTERN LIGHT SERIES

LLO-137A



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
4x1W	130x100x35	/	Aluminium	Black+Gold	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	360-400lm	IP54		

LLO-137B



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
6x1W	180x100x35	/	Aluminium	Black+Gold	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	540-600lm	IP54		


LLO-137C



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
8x1W	235x100x35	/	Aluminium	Black+Gold	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	720-800lm	IP54		


LED OUTDOOR PATTERN LIGHT SERIES

LLO-139ZA DOT OVER LENSE

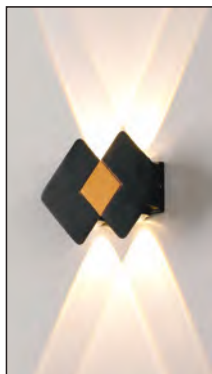

Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
4x1W	145x100x35	/	Aluminium	Black+Gold	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	360-400lm	IP54		

LLO-139ZB DOT OVER LENSE

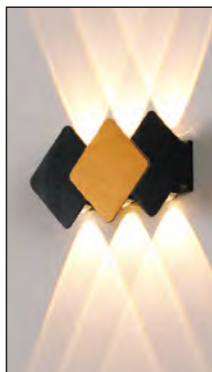

Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
6x1W	190x100x35	/	Aluminium	Black+Gold	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	540-600lm	IP54		


LLO-139ZC DOT OVER LENSE



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
8x1W	240x100x35	/	Aluminium	Black+Gold	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	720-800lm	IP54		

LED Underground Light Fixtures(with IP68 Connector)

LLO-129E




WITH HONEY COMB




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
3W	62x85	60x85	CREE	304 stainless steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	15°	140LM/W	IP67	Stainless Steel	

LLO-129




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
1W	117x67	63x114	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	28°	89lm	IP65	

LLO-129C



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
1W	31x46	29.5x55	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	45°	80lm	IP65	

LLO-129D



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	42x80	40	Bridgelux	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	130lm	IP65	

110-240V
50-60Hz

100-240V
50-60Hz

bridgelux

CREE

OSRAM

EPISTAR

LED Under ground Light

Control different scenes, flexibly compatible
with various spaces


A variety of specifications to meet individual needs



LED Underground Light Fixtures(with IP68 Connector)




LLO-122




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	105x120	97	CREE	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	96°	180lm	IP65	

LLO-127




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	105x125x103	117x102	CREE	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	27°	597lm	IP65	

LLO-128




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	118x100	90	CREE	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	26°	208lm	IP65	

LED Underground Light Fixtures(with IP68 Connector)

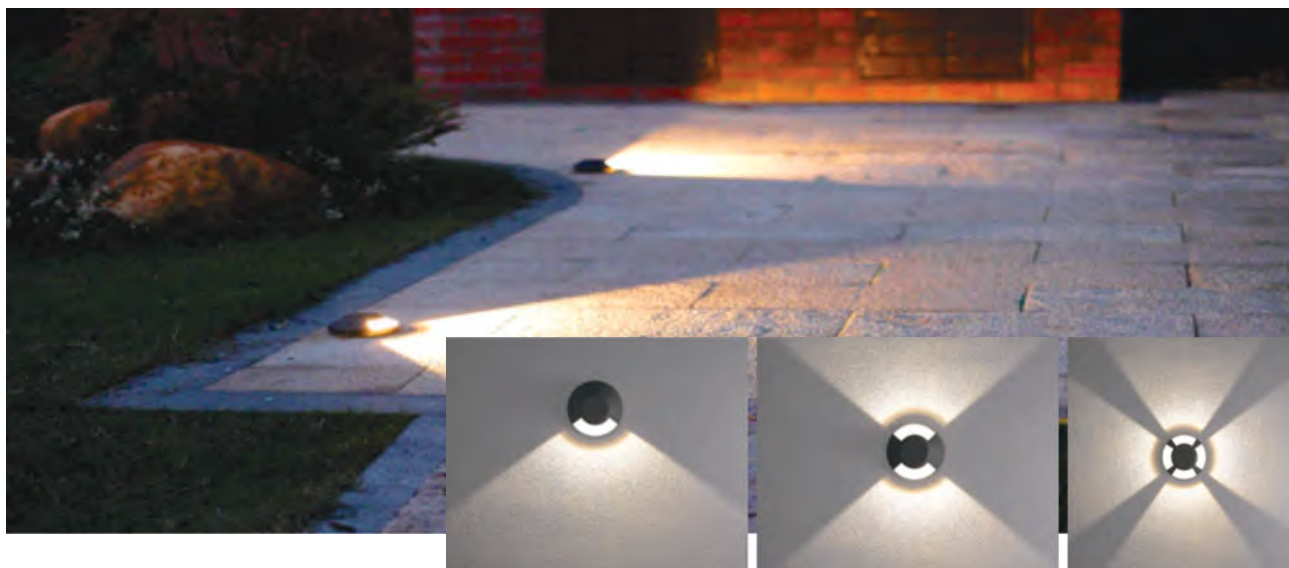


LLO-124




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	140x125	117x118	CREE	Die-cast Aluminium+pc	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	110°	67lm	IP65	

LLO-125



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	140x125	117x118	CREE	Die-cast Aluminium+pc	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	99°	135lm	IP65	

LLO-126



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	140x125	117x118	CREE	Die-cast Aluminium+pc	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	70°	188lm	IP65	

LED Under ground Light

Control different scenes, flexibly compatible
with various spaces

A variety of specifications to meet individual needs




LED Underground Light Fixtures(with IP68 Connector)




LED Underground Light Fixtures(with IP68 Connector)

LLO-129I




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
6W	85x110	75	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	360lm	IP65	

LLO-129J




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
6W	85x100	75	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	720lm	IP65	

LLO-129K



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
12W	120x125	100	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	360lm	IP65	

LLO-129L




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
12W	120x125	100	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	720lm	IP65	

LED Underground Light Fixtures(with IP68 Connector)




LLO-129F




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3x3W	110x100	100	CREE	Die-cast Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	270lm	IP65	

LLO-129G



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
6x2W	160x110	150	CREE	Die-cast Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	360lm	IP65	


LLO-129H



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
9x2W	160x110	150	CREE	Die-cast Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	480lm	IP65	



LED Outdoor Under Ground/surface Fixtures

LLO-129M




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1.5W	210x210x55	CREE	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	90lm	IP67		

LLO-129N




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	210x210x55	CREE	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP67		

LLO-129O




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	210x210x55	CREE	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	360lm	IP67		

LLO-129R



Watt	Dimension(mm)	Cut-Out(mm)	LED Chip	Material	Body color	CCT
32W	Ø190x130	Ø180	CREE	Aluminium	Black	2700K
CRI	Beam Angle	Luminous Flux	IP			
≥80	15°	2500lm	IP67			

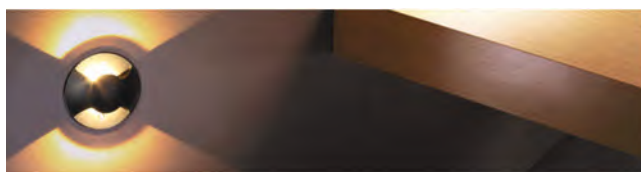


LED Outdoor Concealed Step Light Fixtures




LED Outdoor Concealed Step Light Fixtures

LLO-140




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	80x60	78	CREE	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	50°	146lm	IP54	

LLO-159Y



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	80x42	EPISTAR SMD	Aluminum+ Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	140lm	IP65		

LLO-159Z



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	80x42x80	EPISTAR SMD	Aluminum+ Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	140lm	IP65		

LED Outdoor Concealed Step Light


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs




100-240V
50-60Hz



LED Outdoor Concealed Step Light Fixtures

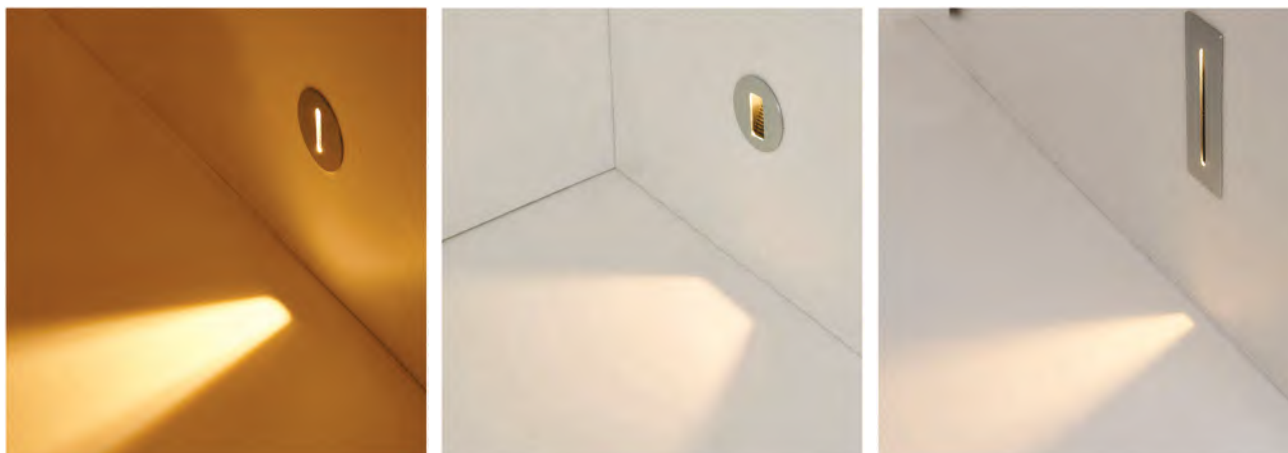


LLO-159A




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
5W	92x73	80x70	EPISTAR COB	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	45°	610lm	IP65	

LLO-159B



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
5W	92x73	80x70	EPISTAR COB	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	20°	610lm	IP65	


LLO-159C



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
5W	170x70x58	56x155x55	EPISTAR COB	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	20°	610lm	IP65	


LED Outdoor Concealed Step Light Fixtures

LLO-159D




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	35x70	30	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	60°	300-310lm	IP65	

LLO-159E




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	35x35x70	30x30	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	60°	300-310lm	IP65	

LLO-159F



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	35x70	30	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	10°	300-310lm	IP65	

LLO-159G




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	35x70	30	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	30°	300-310lm	IP65	

LED Outdoor Concealed Step Light


Control different scenes, flexibly compatible
with various spaces

A variety of specifications to meet individual needs

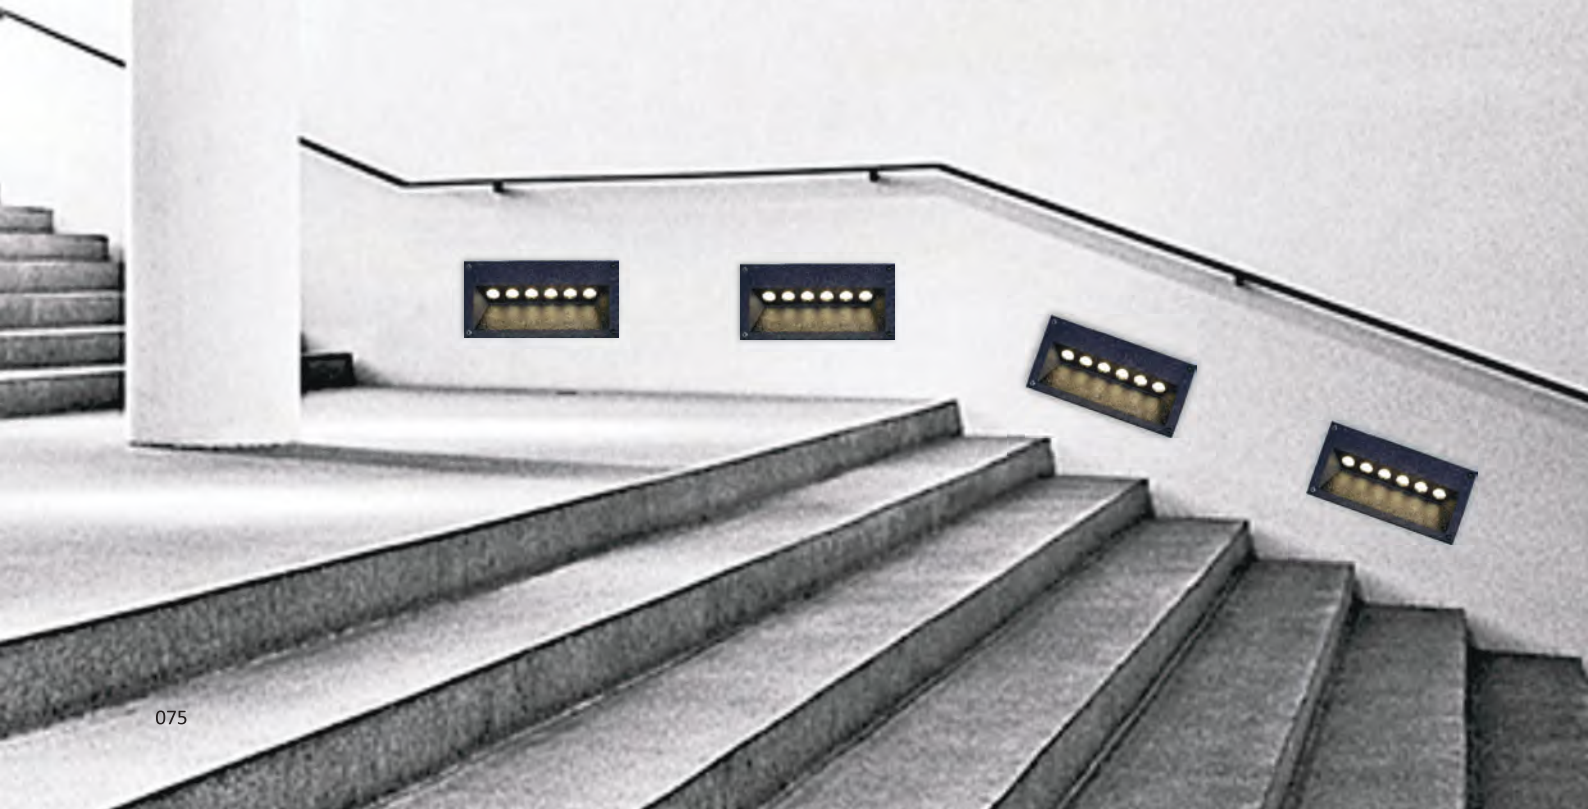


LED Outdoor Concealed Step Light Fixtures

LLO-142




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
2x1W	114x114x65	107x107x62	CREE	Die-cast Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	29°	169lm	IP65	

LLO-143




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
4x1W	114x170x65	107x163x62	CREE	Die-cast Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	31°	327lm	IP65	

LLO-144



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
6x1W	114x226x65	107x219x62	CREE	Die-cast Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	29°	529lm	IP65	

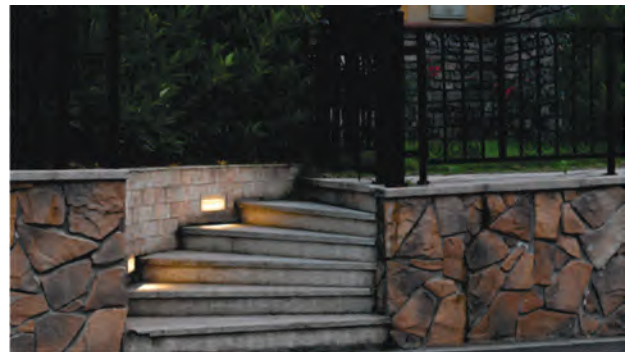


LED Outdoor Step Light Fixtures-concealed



LED Outdoor Step Light


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

LLO-159S



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
2W	43x43	36x36	CREE	Aluminium+pc	Black/White
CCT	CRI	Luminous Flux	IP		
3000K	>80	160lm	IP54		


LLO-159R



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
2W	Ø43	36	CREE	Aluminium+pc	Black/White
CCT	CRI	Luminous Flux	IP		
3000K	>80	160lm	IP54		


LED Outdoor Concealed Step Light Fixtures

LLO-159T




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	90x71x90	EPISTAR SMD	Aluminum + Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	90lm	IP65		

LLO-159U




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	140x71x70	EPISTAR SMD	Aluminum + Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	90lm	IP65		

LLO-159V



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	250x73x98	EPISTAR SMD	Aluminum + PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	900lm	IP65		

LLO-159W





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	250x73x98	EPISTAR SMD	Aluminum + PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	900lm	IP65		

LED OUTDOOR FOOT LIGHTS

LFO-001


MAGNETIC PLATE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	184x40x48.5	160x33x45	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-002



MAGNETIC PLATE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	90.2x90.2x38	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-003

MAGNETIC PLATE




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	52x70x50	Aluminium	Dark Grey/White/Golden	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LED OUTDOOR FOOT LIGHTS

LFO-004


MAGNETIC PLATE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	52x70x50	Aluminium	Dark Grey/White/Golden	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-005


MAGNETIC PLATE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	52x70x50	Aluminium	Dark Grey/White/Golden	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-006


MAGNETIC PLATE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	52x70x50	Aluminium	Dark Grey/White/Golden	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	


LED OUTDOOR FOOT LIGHTS

LFO-007




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	102x58x53.5	96.5x50x50	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP66	

LFO-008




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	146x71x53.5	134x66x51	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-009




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	170x53x70	161x60x50	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	EPISTAR	437.5lm	IP66	

LFO-010




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	255x53x75	247x69x50	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	EPISTAR	700lm	IP66	

LED Garden Light Fixture With Spike/base(IP68 Connectors)

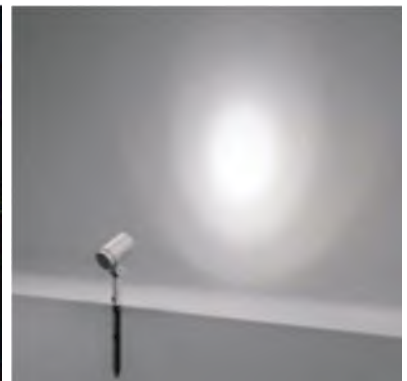


LED Garden Light Fixture With Spike/base(IP68 Connectors)

LLO-160




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	315x76x150	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	23°	433lm	IP65		

LLO-163




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	348x165x92	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	23°	864lm	IP65		

LLO-170



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	380x73x107	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	24°	436lm	IP65		

LLO-175




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	210x247x120	AC COB	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	41°	934lm	IP65		

LED Garden Light Fixture With Spike/base(IP68 Connectors)




LLO-173



						
Watt	Dimension(mm)	LED chip	Material	Body color	CCT	
4x2W	70x80x117/210x50	CREE	Die-cast Aluminium	Dark Grey	3000K	
CRI	Beam Angle	Luminous Flux	IP			
≥ 80	27°	460lm	IP65			

LLO-174




						
Watt	Dimension(mm)	LED chip	Material	Body color	CCT	
1x7W	70x80x117/210x50	CREE	Die-cast Aluminium	Dark Grey	3000K	
CRI	Beam Angle	Luminous Flux	IP			
≥ 80	39°	602lm	IP65			

LED Outdoor Concealed Step Light Fixtures




LLO-176




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	66x45x190	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	300-360lm	IP65		

LLO-177



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	100x66x200	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	520-660lm	IP65		

LLO-178



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	100x66x200	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	1050-1300lm	IP65		

LED Outdoor Concealed Step Light Fixtures




LLO-179




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	30x65	CREE	Aluminium	Silver Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15°	140lm/w	IP65		

LLO-180



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	36x85	CREE	Aluminium	Silver Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15°	140lm/w	IP65		


LLO-181



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	50x120	CREE	Aluminium	Silver Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15°	140lm/w	IP65		


LED Outdoor Fixtures-spike/surface

LLO-179A
WITH HOOD




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	Ø35x80	/	Aluminium	Dark Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	OSRAM	220lm	IP65	

LLO-180A
WITH HOOD



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	Ø35x110	/	Aluminium	Dark Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	Bridgelux	560lm	IP65	


LLO-181A
WITH HOOD



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
10W	Ø49x155	/	Aluminium	Dark Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	Bridgelux	900lm	IP65	


LED Outdoor Fixtures-spike/surface

LLO-182




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	90x139x173	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	13°	1077lm	IP65		

LLO-183




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	88x153x317	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	13°	1077lm	IP65		

LLO-184




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	198x78	CREE	Aluminium/PMMA	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	18-45°	636lm	IP54		

LLO-185



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	332x164x77	CREE	Aluminium/PMMA	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	18-45°	636lm	IP54		

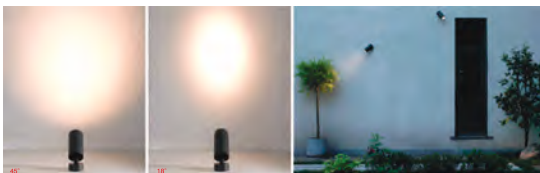


100-240V
50-60Hz




LED Outdoor Fixtures-spike/surface

LLO-186



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
20W	Ø60x128	Bridgelux	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
>80	15°	1800lm	IP65		

LLO-190




Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
6W	90x90x75	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
>80	15°	680lm	IP65		




LED Outdoor Fixtures-spike/surface

LLO-187




Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
7W	99x93x305	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	/	/	IP65		

LLO-188



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
20W	143x128x490	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	/	/	IP65		


LLO-189



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
30W	201x174x544	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	/	/	IP65		


Gu-10 Outdoor Spike Fixture's

LGLS-003




Watt	Dimension(mm)	Material	Body color	IP
MAX 20W	122x138x486	Aluminum	Dark Grey	IP65

LGLS-004




Watt	Dimension(mm)	Material	Body color	IP
Max.35W	115x60x245	Aluminum+ Glass	Dark Grey	IP65

LGLS-005




Watt	Dimension(mm)	Material	Body color	IP
Max.8W	110x50x254	ABS + PC	Dark Grey	IP65

LGLS-006



Watt	Dimension(mm)	Material	Body color	IP
Max.8W	130x80x273	ABS + PC	Dark Grey	IP65

LGLS-007



Watt	Dimension(mm)	Material	Body color	IP
Max.35W	109x98x331	Aluminum+ Glass	Dark Grey	IP65


Outdoor Underwater Lights-24v With IP68 Connector-without Driver




LSP001



LSP005

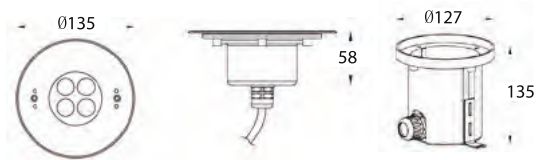

LSP009

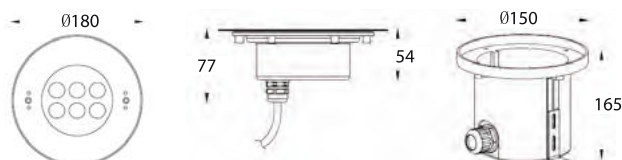

LSP-001/005/009



Item	Watt	Dimension (mm)	Cut-Out (mm)	LED chip	Material	Body color	CCT	CRI	Beam Angle	IP	Voltage
LSP-001	2w	68x73 68x 126x80	80x126	OSRAM	316# stainless steel	Silver	3000K	≥80	30°	IP68	24V
LSP-005	4x2w	135x58	127x 135	OSRAM	316# stainless steel	Silver	3000K	≥80	30°	IP68	24V
LSP-009	6x2w	180x54	150x165	OSRAM	316# stainless steel	Silver	3000K	≥80	30°	IP68	24V

Outdoor Underwater Lights-24v With IP68 Connector-without Driver




- 1: Not to be switched on(Even for testing purpose)if the fixture is not under water
- 2: not to cut the IP68 cable provided by the manufacturer

EPISTAR **OSRAM** 

100-240V
50-60Hz


Outdoor Underwater Lights-24v With IP68 Connector-without Driver

LSP-021




Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
1x2W	70x70x67.5	OSRAM	316# Stainless Steel	Stainless Steel	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	30°	262.5lm	IP66		

LSP-023




Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
3x2W	161x38x90	OSRAM	316# Stainless Steel	Stainless Steel	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	30°	/	IP68		

LSP-028



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
3x1W	52x85	Bridgelux	Aluminium	Silver	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	80°	/	IP66		

LSP-029



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
12W	Ø230x55	OSRAM	Stainless Steel	Stainless Steel	3000K/6000K/Blue
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	980lm	IP66		


LED Bollard's/wall Light



LED Bollard's/wall Light




LB-032



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	250x90	CREE	Aluminium+glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	55°	477lm	IP54		

LB-033



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	450x90	CREE	Aluminium+glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	55°	477lm	IP54		

LB-034




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x90	CREE	Aluminium+glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	55°	477lm	IP54		

LED Bollard's/wall Light


LED BOLLARD'S/ WALL LIGHT

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

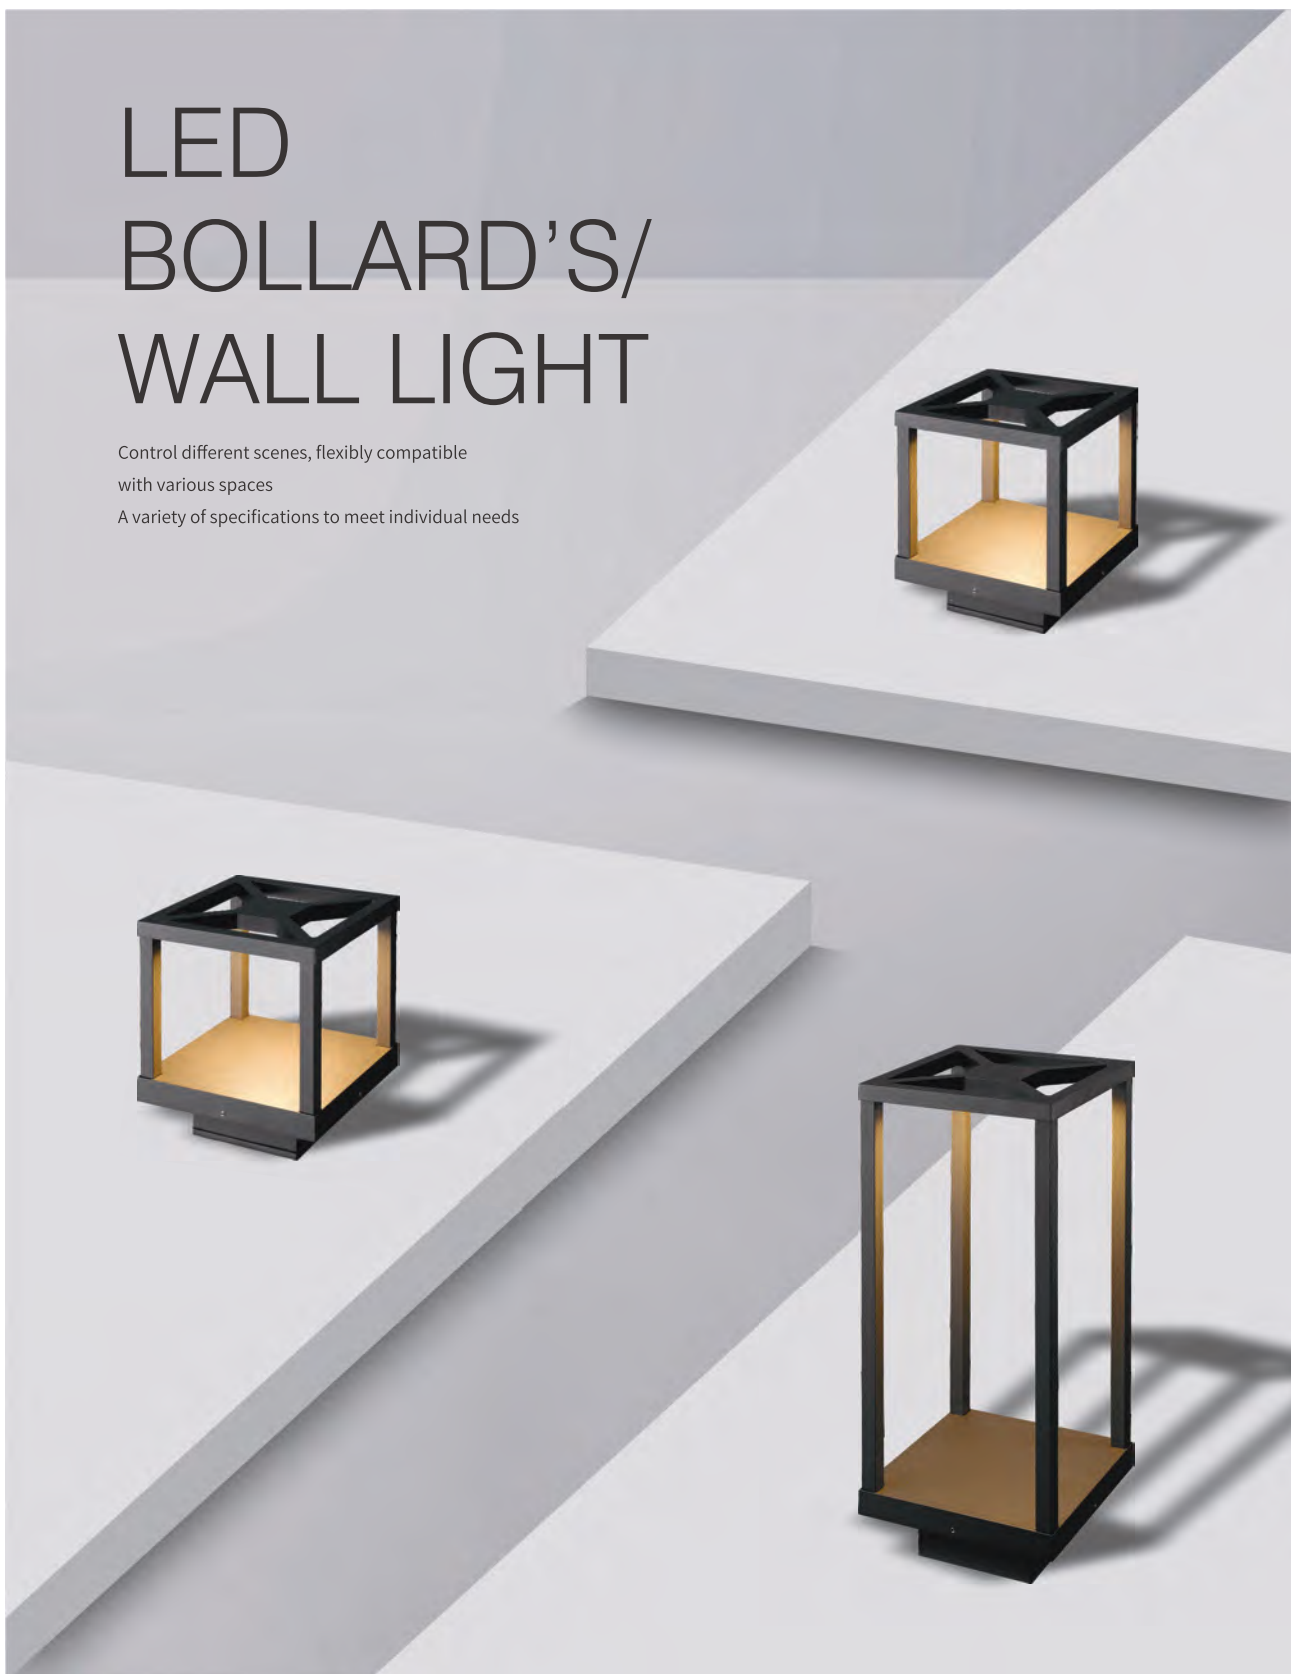


LED Bollard's/wall Light

LB-036



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	230x180	CREE	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	360°	870lm	IP54		

LB-037




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	500x180	CREE	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	360°	1100lm	IP54		



LED Bollard's/wall Light

LB-038




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	300x160x54	CREE	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	329°	497lm	IP54		

LB-039




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x160x54	CREE	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	329°	497lm	IP54		

LB-063



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	300x160x54	EVERLIGHT	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	117° /320°	433lm	IP54		

LB-064




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	650x160x54	EVERLIGHT	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	117° /320°	433lm	IP54		



LED Bollard's/wall Light




LB-042



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	600x75x75	Philips AC LED	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	43°	195lm	IP54		


LB-054



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	600x75x75	Philips AC LED	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	42°	98lm	IP54		

LED Bollard's/wall Light

LB-088



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	600x120x82	Philips AC LED	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	52°	526lm	IP54		


LB-096




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	500x141x141	Philips AC LED	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	47°	858lm	IP54		



LED Bollard's/wall Light

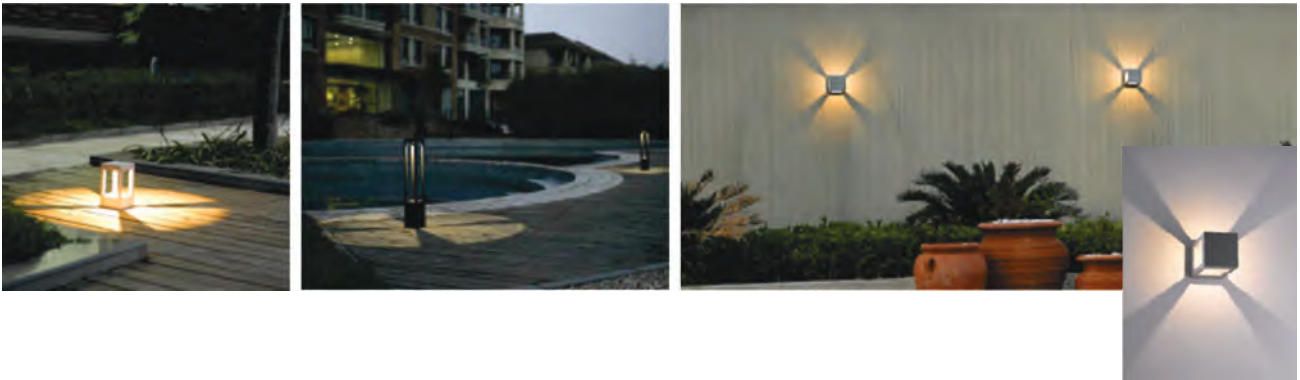


LL0-014




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	160x108x108	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	353lm	IP54		

LB-058



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	200x108x108	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	38°	400lm	IP54		

LB-059




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x108x108	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	29°	356lm	IP54		

LED Bollard's/wall Light




LL0-097




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	175x120x40	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	160°	290lm	IP54		

LB-056



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	350x120x40	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	45°	290lm	IP54		

LB-057




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x120x40	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	45°	290lm	IP54		

LED Bollard's/wall Light




LLO-070




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	239.5x110x176	EVERLIGHT-AC LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	185°	659lm	IP65		

LB-072



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	500x110	EVERLIGHT-AC LED	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	185°	659lm	IP65		

LB-073




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	900x110	EVERLIGHT-AC LED	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	185°	659lm	IP65		

100-240V
50-60Hz

EVERLIGHT


LED Bollard's/wall Light

LL0-076




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	200x128x169	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	175°	215lm	IP54		

LB-074




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	200x128x123	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	175°	201lm	IP54		

LB-075



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	500x128x123	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	175°	258lm	IP54		

LB-076




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	800x128x123	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	175°	254lm	IP54		

LED Bollard's/wall Light




LLO-079C




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	222x282x165	Philips	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	105°	555lm	IP65		

LB-108




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	165x650x120	Philips	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	47°	565lm	IP65		

LED Bollard's/wall Light

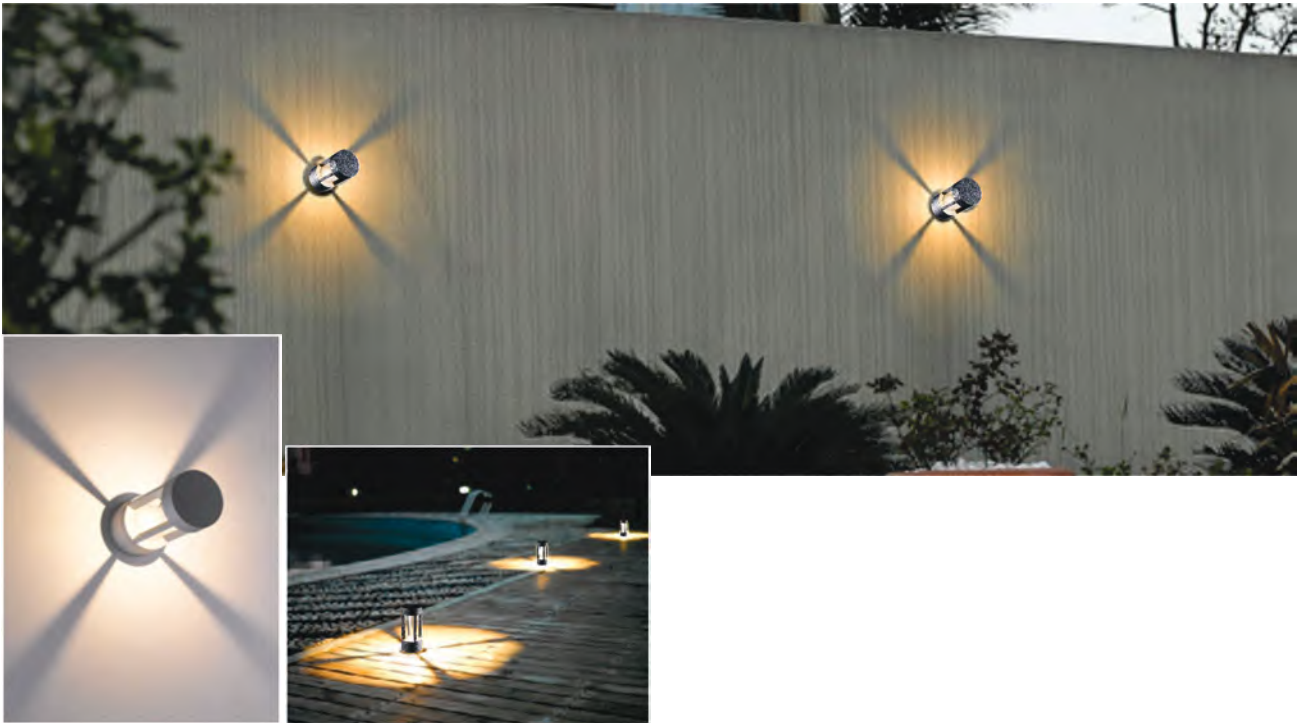


LED Bollard's/wall Light

LLO-038



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	160x90	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	40°	423lm	IP54		

LB-083



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	200x90	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	40°	419lm	IP54		

LB-084



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x90	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	40°	420lm	IP54		

LED Bollard's wall Light

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

200-240V
50-60Hz




REACH

LED Bollard's/wall Light





LED Bollard's/wall Light

LB-100




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	300x151x151	OSRAM	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	197°	290lm	IP54		

LB-101



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	500x151x151	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	270°	580lm	IP54		

LB-102




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	800x151x151	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	270°	580lm	IP54		




LED Outdoor Bollards

LED Outdoor Bollards

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

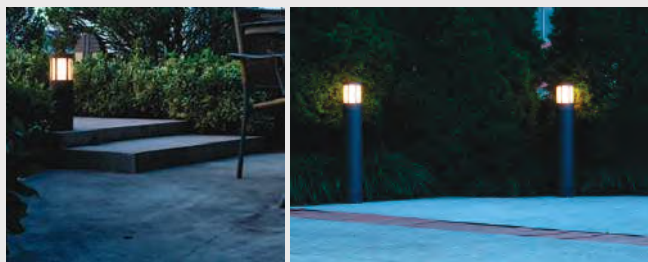


LB-122



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	145x500	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	1062lm	IP54		

LB-123




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	145x900	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	1062lm	IP54		

LED Outdoor Bollards




LB-124



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	500x147	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	814lm	IP54		

LB-125




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	900x147	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	814lm	IP54		

EVERLIGHT

LED Outdoor Bollard's/wall Lights


Control different scenes, flexibly compatible
with various spaces

A variety of specifications to meet individual needs

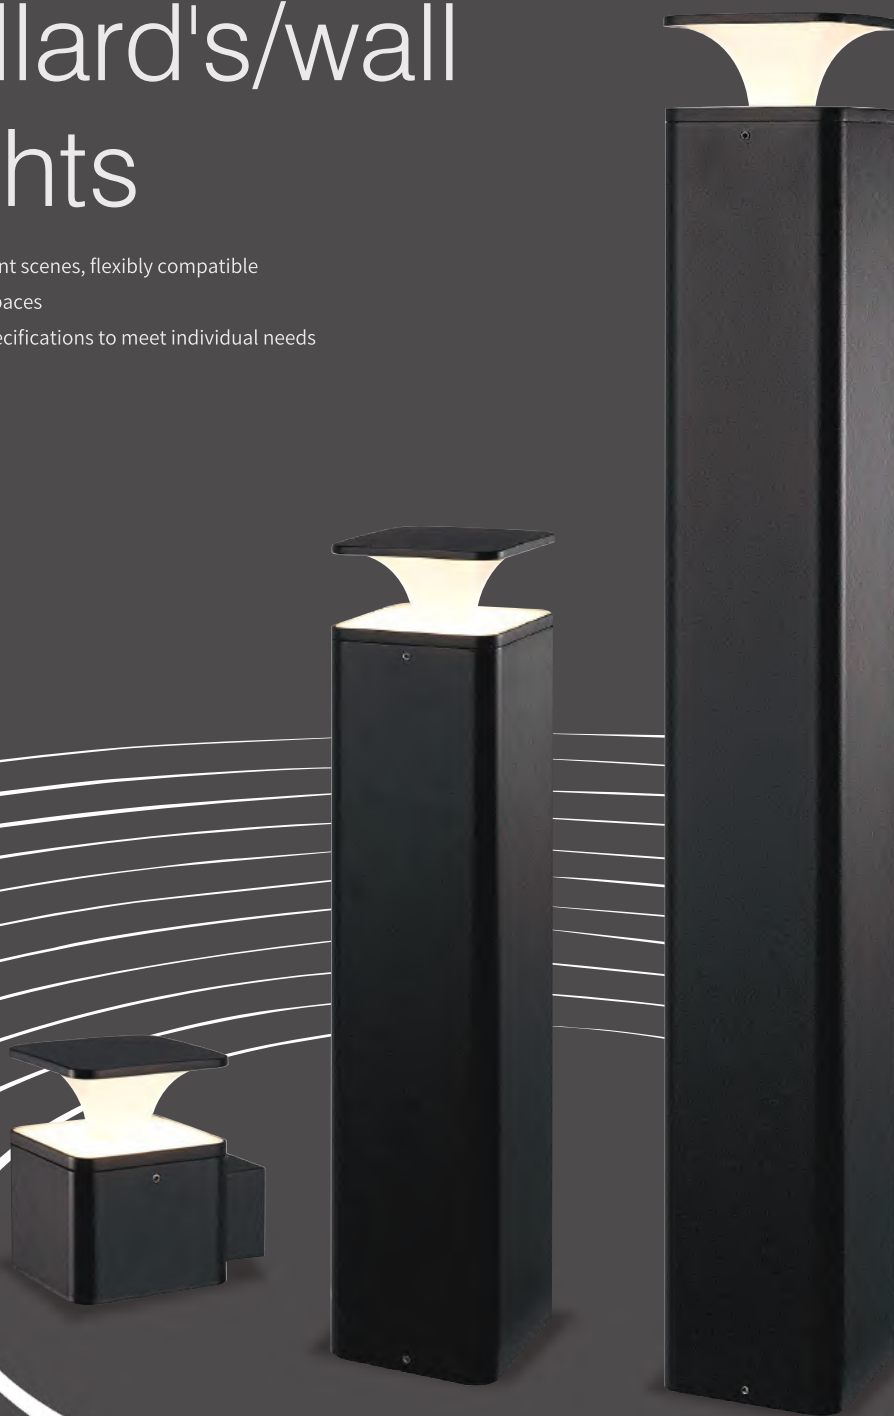


LED Outdoor Bollard's/wall Lights

LLO-079D




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	135x131x101	EVERLIGHT	Aluminium+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	439lm	IP54		

LB-126




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	101x250	EVERLIGHT	Aluminium+PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	439lm	IP65		

LB-127




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	101x500	EVERLIGHT	Aluminium+PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	439lm	IP54		

LB-128




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	101x750	EVERLIGHT	Aluminium+PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	439lm	IP54		

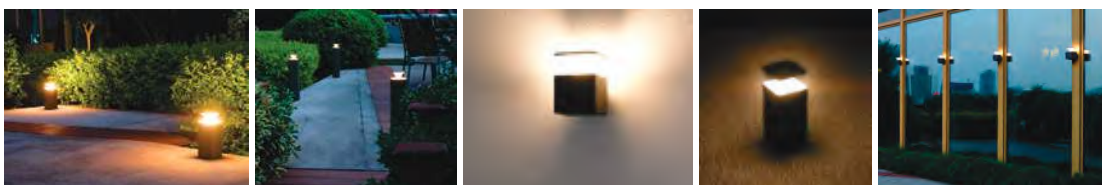

EVERLIGHT


LED Outdoor Bollard's/wall Lights

LB-137




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	Ø107x400	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP65		

LB-138




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	Ø107x600	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP65		

LB-139



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	Ø107x800	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP65		


LLO-079P



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	107x120x275	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP65		


LED Outdoor Bollard's/wall Lights

LLO-079Q




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	150x100x100	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	720lm	IP65		

LB-140



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	100x100x500	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	720lm	IP65		

LB-141



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	100x100x800	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	720lm	IP65		



EPISTAR

LED Outdoor Bollard's/wall Lights

LB-146



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	178x69x300	CREE LED	Aluminum + PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	296°	894lm	IP65		

LB-147



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	178x69x650	CREE LED	Aluminum + PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	296°	894lm	IP65		


LED Outdoor Bollard's/wall Lights

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs




LED Outdoor Bollard's/wall Lights

LB-148



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
24W	276x140x430	EVERLIGHT SMD LED	Aluminum + PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	144°	1850lm	IP65		

LB-149




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
24W	276x75x380	EVERLIGHT SMD LED	Aluminum + PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	144°	1850lm	IP65		

LB-129



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	240x260	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	1118lm	IP54		


LB-175



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6.5W	Ø140x99	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	120°	/	/	IP65	


LED Outdoor Bollard's/wall Lights

LB-150




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	161x55x250	CREE LED	Aluminium /PMMA	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	28°	345lm	IP65		

LB-151




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	166 x 55 x800	CREE LED	Aluminium /PMMA	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	28°	690lm	IP65		

LB-157



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	120x900	CREE LED	Aluminium/Glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	24°	514lm	IP54		

LB-158




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	120x700	CREE LED	Aluminium/Glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	21°	223lm	IP54		

LED Outdoor Bollard's/wall Lights




LB-152



Watt	Dimension(mm)	LED	Material	Body color
6W	220x270	SMD LED	Aluminium+Iron/PC	Graphite Black
CRI	Beam Angle	Luminous Flux	IP	
≥ 80	174°	429lm	IP65	

LB-153





Watt	Dimension(mm)	LED	Material	Body color
12W	360x574	SMD LED	Aluminium+Iron/PC	Graphite Black
CRI	Beam Angle	Luminous Flux	IP	
≥ 80	154°	992lm	IP65	

110-130V
50-60Hz

200-240V
50-60Hz


LED Outdoor Bollard's/Wall Lites

LB-154





Watt	Dimension(mm)	LED	Material	Body color
6W	78x1500	CREE LED	Aluminium/Glass	Graphite Black
CRI	Beam Angle	Lumens	IP	
≥80	36°	596lm	IP54	

LB-155



Watt	Dimension(mm)	LED	Material	Body color
12W	201x489x2012	CREE LED	Aluminium/Glass	Graphite Black
CRI	Beam Angle	Lumens	IP	
≥80	36°	1190lm	IP54	

LB-156



Watt	Dimension(mm)	LED	Material	Body color
24W	326x404x2012	CREE LED	Aluminium/Glass	Graphite Black
CRI	Beam Angle	Lumens	IP	
≥80	36°	1780lm	IP54	




100-240V
50-60Hz



LED Outdoor Bollard's/Wall Lites




LLO-079S



Watt	Dimension(mm)	LED	Material	Body color
10W	180x62	SMD LED	Aluminium/PC	Dark Grey
CRI	Beam Angle	Lumens	IP	
≥ 80	99°	936lm	IP54	

LB-159




Watt	Dimension(mm)	LED	Material	Body color
10W	180x500	SMD LED	Aluminium/PC	Graphite Black
CRI	Beam Angle	Lumens	IP	
≥ 80	97°	761lm	IP54	

220-240V
50-60Hz



LED Outdoor Bollard's/Wall Lites

LB-163





Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
13W	164x47x400	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	219°	OSRAM	487lm	IP65	

LB-163A



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
13W	164x47x400	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	219°	OSRAM	487lm	IP65	


LB-163B



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
13W	164x47x800	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	219°	OSRAM	487lm	IP65	


LED Outdoor Bollard's/Wall Lites

LLO-079W




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	160x194x231	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	/	OSRAM	/	IP65	

LB-161



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	160x244x400	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	/	OSRAM	/	IP65	


LB-161A



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	160x244x600	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	/	OSRAM	/	IP65	

LED Outdoor Bollard's/Wall Lites

LB-164



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
13W	135x227x800	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	186°	OSRAM	660lm	IP65	




LED Outdoor Bollard's/Wall Lite





LB-167

CASTING WITH GLASS




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	400x70x206	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	327°	OSRAM	458lm	IP65	

LB-167A




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	900x70x206	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	327°	OSRAM	458lm	IP65	

LED Outdoor Bollard's/Wall Lites

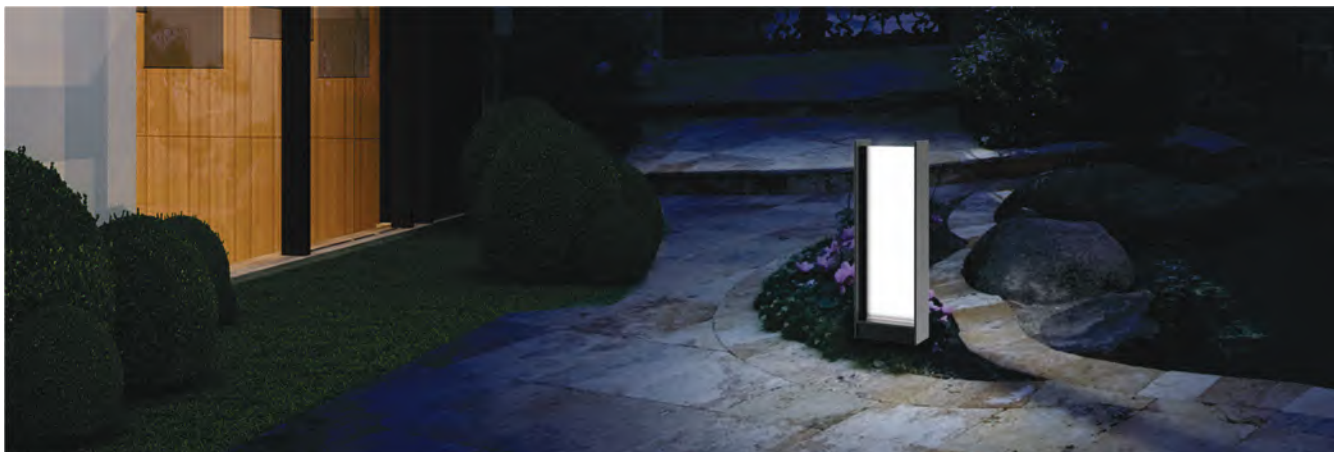

LB-168



CASTING WITH GLASS



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	300x80x175	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	257°	OSRAM	492lm	IP65	

LB-168A


CASTING WITH GLASS



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	500x80x175	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	284°	OSRAM	460lm	IP65	

LED Outdoor Bollard's/Wall Lites



LB-169



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	Ø430x438	Surface	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	/	/	487lm	IP65	

LB-170


MOVABLE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	190x820	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	Bridgelux	/	IP65	

LB-171

MOVABLE




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3x4.5W	1010xØ140	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	45°	Bridgelux	/	IP65	

LED Outdoor Bollard's/Wall Lites

LB-172


MOVING HEAD



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø40x400	Surface	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	60°	CREE	/	IP65	

LB-173


MOVING HEAD



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2x3W	Ø40x800	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	60°	CREE	/	IP65	

LB-174


MOVING HEAD



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3x2W	Ø40x1200	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	60°	CREE	/	IP65	


E-27 Bollard's/wall Lites

LB-001



Watt	Dimension(mm)	LED	Material	Body color
18W	200x110	E27 HOLDER	Aluminium+glass	Graphite Black
CRI	IP			
≥80	IP44			

LB-002



Watt	Dimension(mm)	LED	Material	Body color
18W	650x110	E27 HOLDER	Aluminium+glass	Graphite Black
CRI	IP			
≥80	IP44			



110-130V
50-60Hz


200-240V
50-60Hz



REACH


E-27 Bollard's/wall Lites

LB-003




Dimension(mm)	LED	Material	Body color	CRI	IP
200x110	E27 HOLDER	Aluminium+glass	Graphite Black	≥80	IP44

LB-004




Dimension(mm)	LED	Material	Body color	CRI	IP
650x110	E27 HOLDER	Aluminium+glass	Graphite Black	≥80	IP44

LB-005



Dimension(mm)	LED	Material	Body color	CRI	IP
220x270	E27 HOLDER	Aluminium+glass	Graphite Black	≥80	IP44

LB-006




Dimension(mm)	LED	Material	Body color	CRI	IP
220x150	E27 HOLDER	Aluminium+glass	Graphite Black	≥80	IP44

E-27 Bollard's/wall Lites




LB-119




Dimension(mm)	LED	Material	Body color	CRI	IP
227x227x255	E27 HOLDER	Aluminium+pc	Graphite Black	≥80	IP65

LB-120



Dimension(mm)	LED	Material	Body color	CRI	IP
170x170x210	E27 HOLDER	Aluminium+pc	Graphite Black	≥80	IP65

LB-121




Dimension(mm)	LED	Material	Body color	CRI	IP
350x350x395	E27 HOLDER	Aluminium+pc	Graphite Black	≥80	IP65

E-27 Bollard's/wall Lites




LB-021




Dimension(mm)	LED	Material	Body color
150x150x161	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥80	IP IP65		

LB-022



Dimension(mm)	LED	Material	Body color
251x251x270	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥80	IP IP65		

LB-166

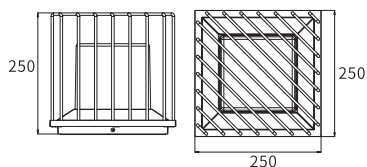


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	250x250x250	/	Aluminium	Sand Black	3000K
CRI >80	Beam Angle 238°	LED Chip OSRAM	Luminous Flux 1474lm	IP IP65	

E-27 Bollard's/wall Lites



Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

LB-007



Dimension(mm)

200x220

CRI

≥80

LED

E27 HOLDER

IP

IP44


Material

Aluminium+pc

Body color

Graphite Black

LB-008



Dimension(mm)

650x220

CRI

≥80

LED

E27 HOLDER

IP

IP44

Material

Aluminium+pc

Body color

Graphite Black

110-130V
50-60Hz


200-240V
50-60Hz

CE **RoHS** **REACH**
COMPLIANT

E-27 Bollard's/wall Lites



LWL-004



Dimension(mm)

220x200x277

CRI

≥80

LED

E27 HOLDER


Material

Aluminium+pc

Body color

Black

LB-013



Dimension(mm)

200x220

CRI

≥80

LED

E27 HOLDER


Material

Aluminium+pc

Body color

Graphite Black

LB-014



Dimension(mm)

650x220

CRI

≥80

LED

E27 HOLDER

Material

Aluminium+pc


Body color

Graphite Black


110-130V
50-60Hz

200-240V
50-60Hz

E-27 Bollard's/wall Lites

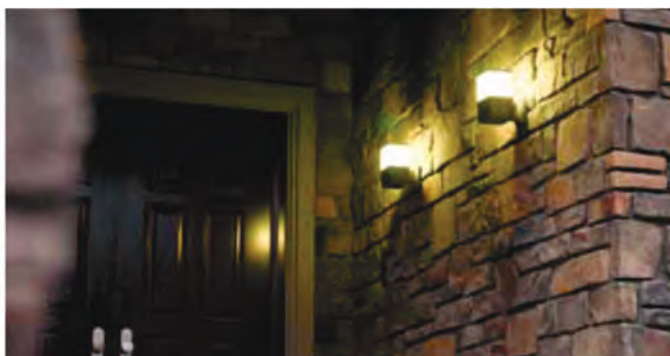


LWL-002




Dimension(mm)	LED	CRI	Material	IP	Body color
108x178x202	E27 HOLDER	≥80	Aluminium+pc	IP44	Black

LB-011



Dimension(mm)	LED	CRI	Material	IP	Body color
200x108	E27 HOLDER	≥80	Aluminium+pc	IP44	Graphite Black

LB-012



Dimension(mm)	LED	CRI	Material	IP	Body color
650x108	E27 HOLDER	≥80	Aluminium+pc	IP44	Graphite Black

110-130V
50-60Hz

200-240V
50-60Hz




REACH

E-27 Bollard's/wall Lites




LB-009



Dimension(mm)	LED	CRI	Material	IP	Body color
200x108	E27 HOLDER	≥80	Aluminium+pc	IP44	Graphite Black


LB-010



Dimension(mm)	LED	CRI	Material	IP	Body color
650x108	E27 HOLDER	≥80	Aluminium+pc	IP44	Graphite Black

E-27 Bollard's/wall Lites

LWL-036



Dimension(mm)

211x168x197

CRI

≥80

LED

E27 HOLDER

IP

IP44


Material

Aluminium+pc

Body color

Black

LB-015



Dimension(mm)

300x168x175

CRI

≥80

LED

E27 HOLDER

IP

IP44


Material

Aluminium+pc

Body color

Graphite Black

LB-016



Dimension(mm)

500x168x175

CRI

≥80

LED

E27 HOLDER

IP

IP44


Material

Aluminium+pc

Body color

Graphite Black

LB-017



Dimension(mm)

800x168x175

CRI

≥80

LED

E27 HOLDER

IP

IP44

Material

Aluminium+pc

Body color

Graphite Black


100-240V
50-60Hz

E-27 Bollard's/wall Lites




E-27 Bollard's/wall Lites

LWL-007




Watt	Dimension(mm)	LED	Material	Body color
23W	250x120x170	E27 HOLDER	Aluminium+pc	Black
CRI	IP			
≥80	IP44			

LB-018




Watt	Dimension(mm)	LED	Material	Body color
23W	300x120x120	E27 HOLDER	Aluminium+pc	Graphite Black
CRI	IP			
≥80	IP44			

LB-019



Watt	Dimension(mm)	LED	Material	Body color
23W	500x120x120	E27 HOLDER	Aluminium+pc	Graphite Black
CRI	IP			
≥80	IP44			

LB-020




Watt	Dimension(mm)	LED	Material	Body color
23W	800x120x120	E27 HOLDER	Aluminium+pc	Graphite Black
CRI	IP			
≥80	IP44			

E-27 Bollard's/wall Lites




LWL-035




Dimension(mm)	LED	Material	CRI	IP	Body color
250x128.5x172	E27 HOLDER	Aluminium+pc	≥80	IP44	Black

LB-026




Dimension(mm)	LED	Material	CRI	IP	Body color
300x128x123	E27 HOLDER	Aluminium+pc	≥80	IP44	Graphite Black

LB-027



Dimension(mm)	LED	Material	CRI	IP	Body color
500x128x123	E27 HOLDER	Aluminium+pc	≥80	IP44	Graphite Black


LB-028



Dimension(mm)	LED	Material	CRI	IP	Body color
800x128x123	E27 HOLDER	Aluminium+pc	≥80	IP44	Graphite Black


E-27 Bollard's/wall Lites

LB-023




Dimension(mm)	LED	Material	CRI	IP	Body color
300x101.8x104.1	E27 HOLDER	Aluminium + pc	≥80	IP44	Graphite Black

LB-024



Dimension(mm)	LED	Material	CRI	IP	Body color
500x101.8x104.1	E27 HOLDER	Aluminium + pc	≥80	IP44	Graphite Black

LB-025




Dimension(mm)	LED	Material	CRI	IP	Body color
800x101.8x104.1	E27 HOLDER	Aluminium + pc	≥80	IP44	Graphite Black



100-240V
50-60Hz


E-27 Bollard's/wall Lites

LB-029




Dimension(mm)	LED	Material	CRI	IP	Body color
300x100x100	E27 HOLDER	Aluminium + pc	≥80	IP44	Graphite Black

LB-029A



Dimension(mm)	LED	Material	CRI	IP	Body color
500x100x100	E27 HOLDER	Aluminium + pc	≥80	IP44	Graphite Black

LB-029B



Dimension(mm)	LED	Material	CRI	IP	Body color
800x100x100	E27 HOLDER	Aluminium + pc	≥80	IP44	Graphite Black

E-27 Bollard's/ wall Lites


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs



E-27 Bollard's/wall Lights




LWL-051




Dimension(mm)	LED	Material	Body color	CRI	IP
276x160x215	E27 HOLDER	Die-cast Aluminium	Black	≥80	IP65

LB-113




Dimension(mm)	LED	Material	Body color	CRI	IP
220x160x215	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

LB-114



Dimension(mm)	LED	Material	Body color	CRI	IP
350x160	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

LB-115




Dimension(mm)	LED	Material	Body color	CRI	IP
500x160	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

100-240V
50-60Hz

E-27 Bollard's/wall Lights




LWL-052




Dimension(mm)	LED	Material	Body color	CRI	IP
276x145x215	E27 HOLDER	Die-cast Aluminium	Black	≥80	IP65

LB-116




Dimension(mm)	LED	Material	Body color	CRI	IP
145x145x220	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

LB-117



Dimension(mm)	LED	Material	Body color	CRI	IP
145x145x350	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

LB-118




Dimension(mm)	LED	Material	Body color	CRI	IP
145x145x500	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

E-27 Bollard's/wall Lights



LWL-061




Dimension(mm)	Hoder	Material	Body color	IP
135x202x260	E27	Aluminium	Anthracite	IP54

LB-142



Dimension(mm)	Hoder	Material	Body color	IP
135x382	E27	Aluminium+pc	Graphite Black	IP54


LB-143



Dimension(mm)	Hoder	Material	Body color	IP
135x800	E27	Aluminium+pc	Graphite Black	IP54


E-27 Bollard's/wall Lights

LB-162




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
Max 23W	230x210x700	/	Aluminium	Dark Grey	/
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
/	/	E27	/	IP54	

LB-165



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
Max 23W	520xØ330	/	Aluminium	Dark Grey	/
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
/	/	E27	/	IP54	


LB-165A

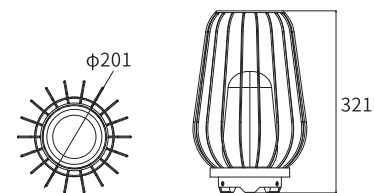

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
Max 23W	321xØ201	/	Aluminium	Dark Grey	/
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
/	/	E27	/	IP54	


E-27/gu-10 Outdoor Wall Light

LWL-041




Dimension(mm)	LED	Material	Body color	CRI	IP
220x220x82	E27 HOLDER	Aluminium+glass	Black	≥80	IP54

LWL-042




Dimension(mm)	LED	Material	Body color	CRI	IP
256x86x88	E27 HOLDER	Aluminium+glass	Black	≥80	IP54

LWL-043



Dimension(mm)	LED	Material	Body color	CRI	IP
265x95x90	E27 HOLDER	Aluminium+glass	Black	≥80	IP54


LWL-044



Dimension(mm)	LED	Material	Body color	CRI	IP
256x86x88	E27 HOLDER	Aluminium+glass	Black	≥80	IP54


E-27/gu-10 Outdoor Wall Light

LWL-045




Dimension(mm)	LED	Material	Body color	CRI	IP
108x90	GU10	Aluminium+glass	Black	≥80	IP54

LWL-047



Dimension(mm)	LED	Material	Body color	CRI	IP
108x120x90	GU10	Aluminium+glass	Black	≥80	IP54

LWL-049



Dimension(mm)	LED	Material	Body color	CRI	IP
155x120x90	GU10	Aluminium+glass	Black	≥80	IP54

E-27/Gu-10 Outdoor Wall Light


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs



100-240V
50-60Hz


E-27/gu-10 Outdoor Wall Light

LWL-046




Dimension(mm)	LED	Material	Body color	CRI	IP
108x85x85	GU10	Aluminium+glass	Black	≥80	IP54

LWL-048



Dimension(mm)	LED	Material	Body color	CRI	IP
108x115x85	GU10	Aluminium+glass	Black	≥80	IP54


LWL-050



Dimension(mm)	LED	Material	Body color	CRI	IP
155x115x85	GU10	Aluminium+glass	Black	≥80	IP54




LED Pole Lights

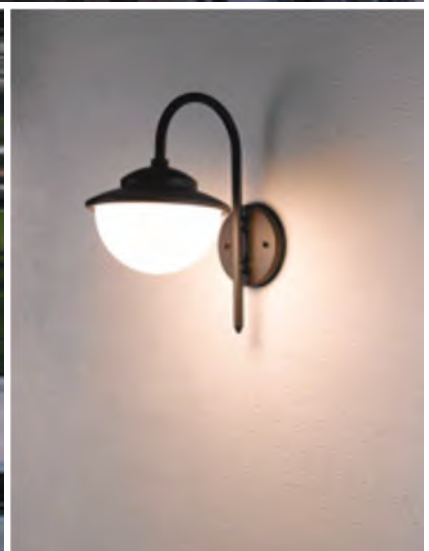


LED Pole Lights

LLO-072





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	335x280x196	EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	132°	1088lm	IP54		

LPL-004



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	1000x295	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	132°	1088lm	IP54		

LPL-005

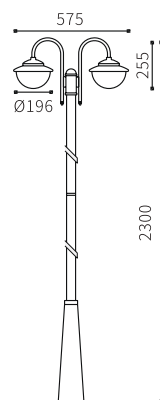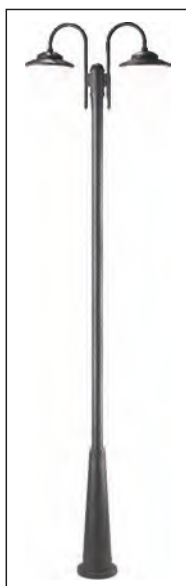

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x9W	2300x575	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	132°	2177lm	IP54		

100-240V
50-60Hz


EVERLIGHT



REACH


LED Pole Lights

LPL-006



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	1250x120x80	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	354°	1070lm	IP54		

LPL-008





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	750x120x80	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	354°	535lm	IP54		



LED Pole Lights



LPL-007

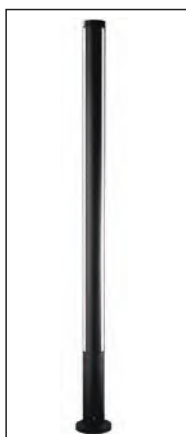

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
27W	2000x120x80	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	354°	1600lm	IP54		

100-240V
50-60Hz

EVERLIGHT



CE

RoHS
COMPLIANT

REACH

LED Pole Lights

LPL-010

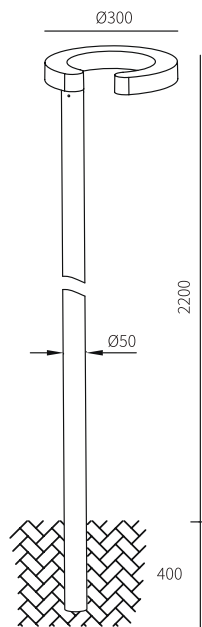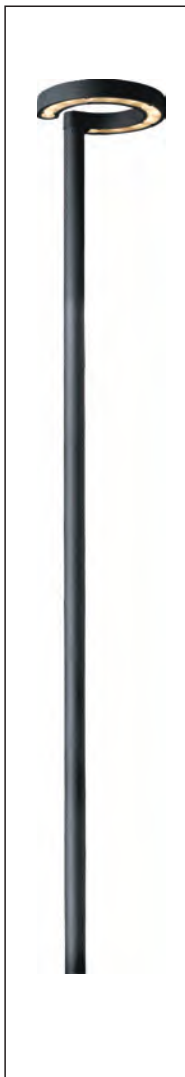


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12x2W	2200x300	CREE	Die-cast Aluminium	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	54°	879lm	IP54		



LED Pole Lights

LPL-011




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
36W	145x1200	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
> 80	360°	2300lm	IP54		



EVERLIGHT

LED Pole Lights

LPL-012





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	145x1700	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	2300lm	IP54		




EVERLIGHT

LED Pole Lights

LPL-013

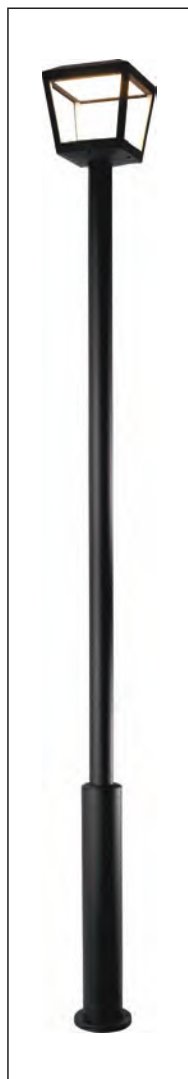

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	240x2200	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	1118lm	IP54		


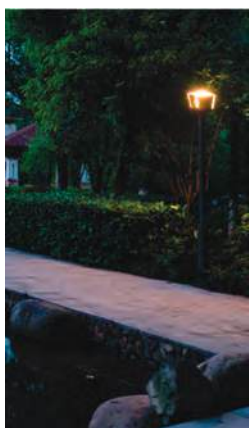


100-240V
50-60Hz

EVERLIGHT

LED Pole Lights

LPL-015

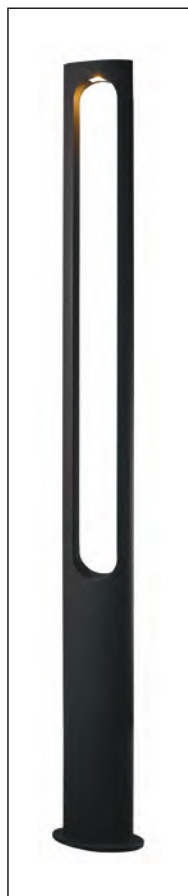

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	230x69x1500	CREE LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	328°	1559lm	IP65		




100-240V
50-60Hz



LED Pole Lights

LPL-018




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
24W	276x140x2500	SMD LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	144°	1850lm	IP65		



100-240V
50-60Hz


LED Pole Lights

LLO-079R




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	170x237x430	SMD LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	301°	620lm	IP54		

LPL-016

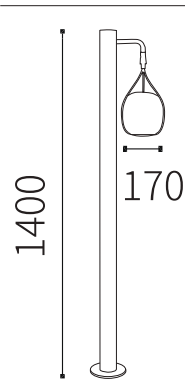

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	170x336x1400	SMD LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	301°	620lm	IP54		


LPL-017

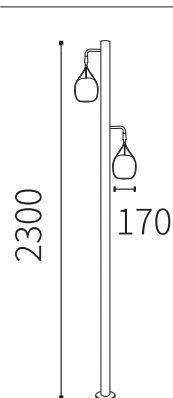

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
24W	170x532x2300	SMD LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	301°	1240lm	IP54		


LED Pole Lights

LPL-019

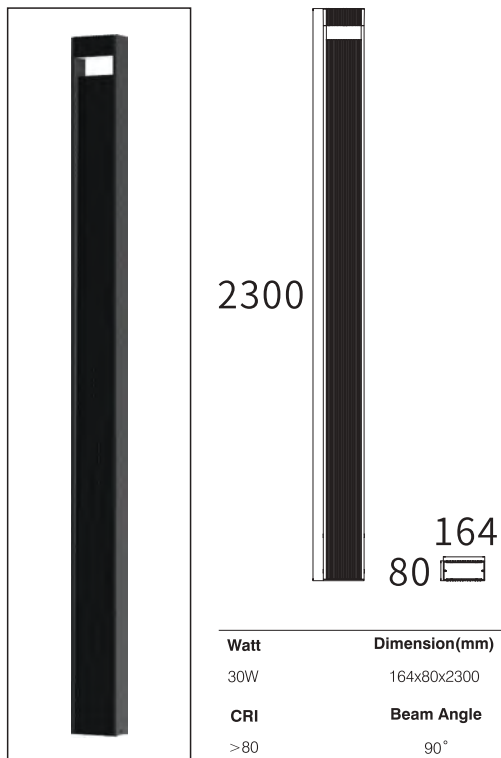

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
30W	164x80x2300	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	OSRAM	2029lm	IP65	

LPL-020

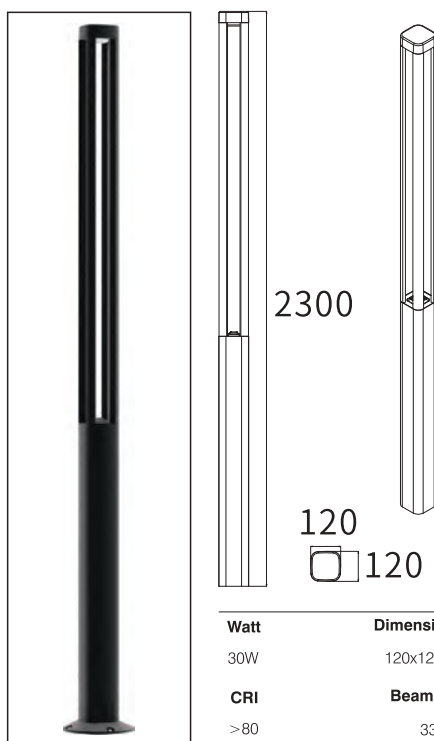


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
30W	120x120x2300	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	334°	OSRAM	1323lm	IP65	

LED Pole Lights

LED OUTDOOR POLE LIGHTS SERIES



Minimalist design, exquisite and durable
Villa courtyard, terrace garden
suitable for multiple scenarios

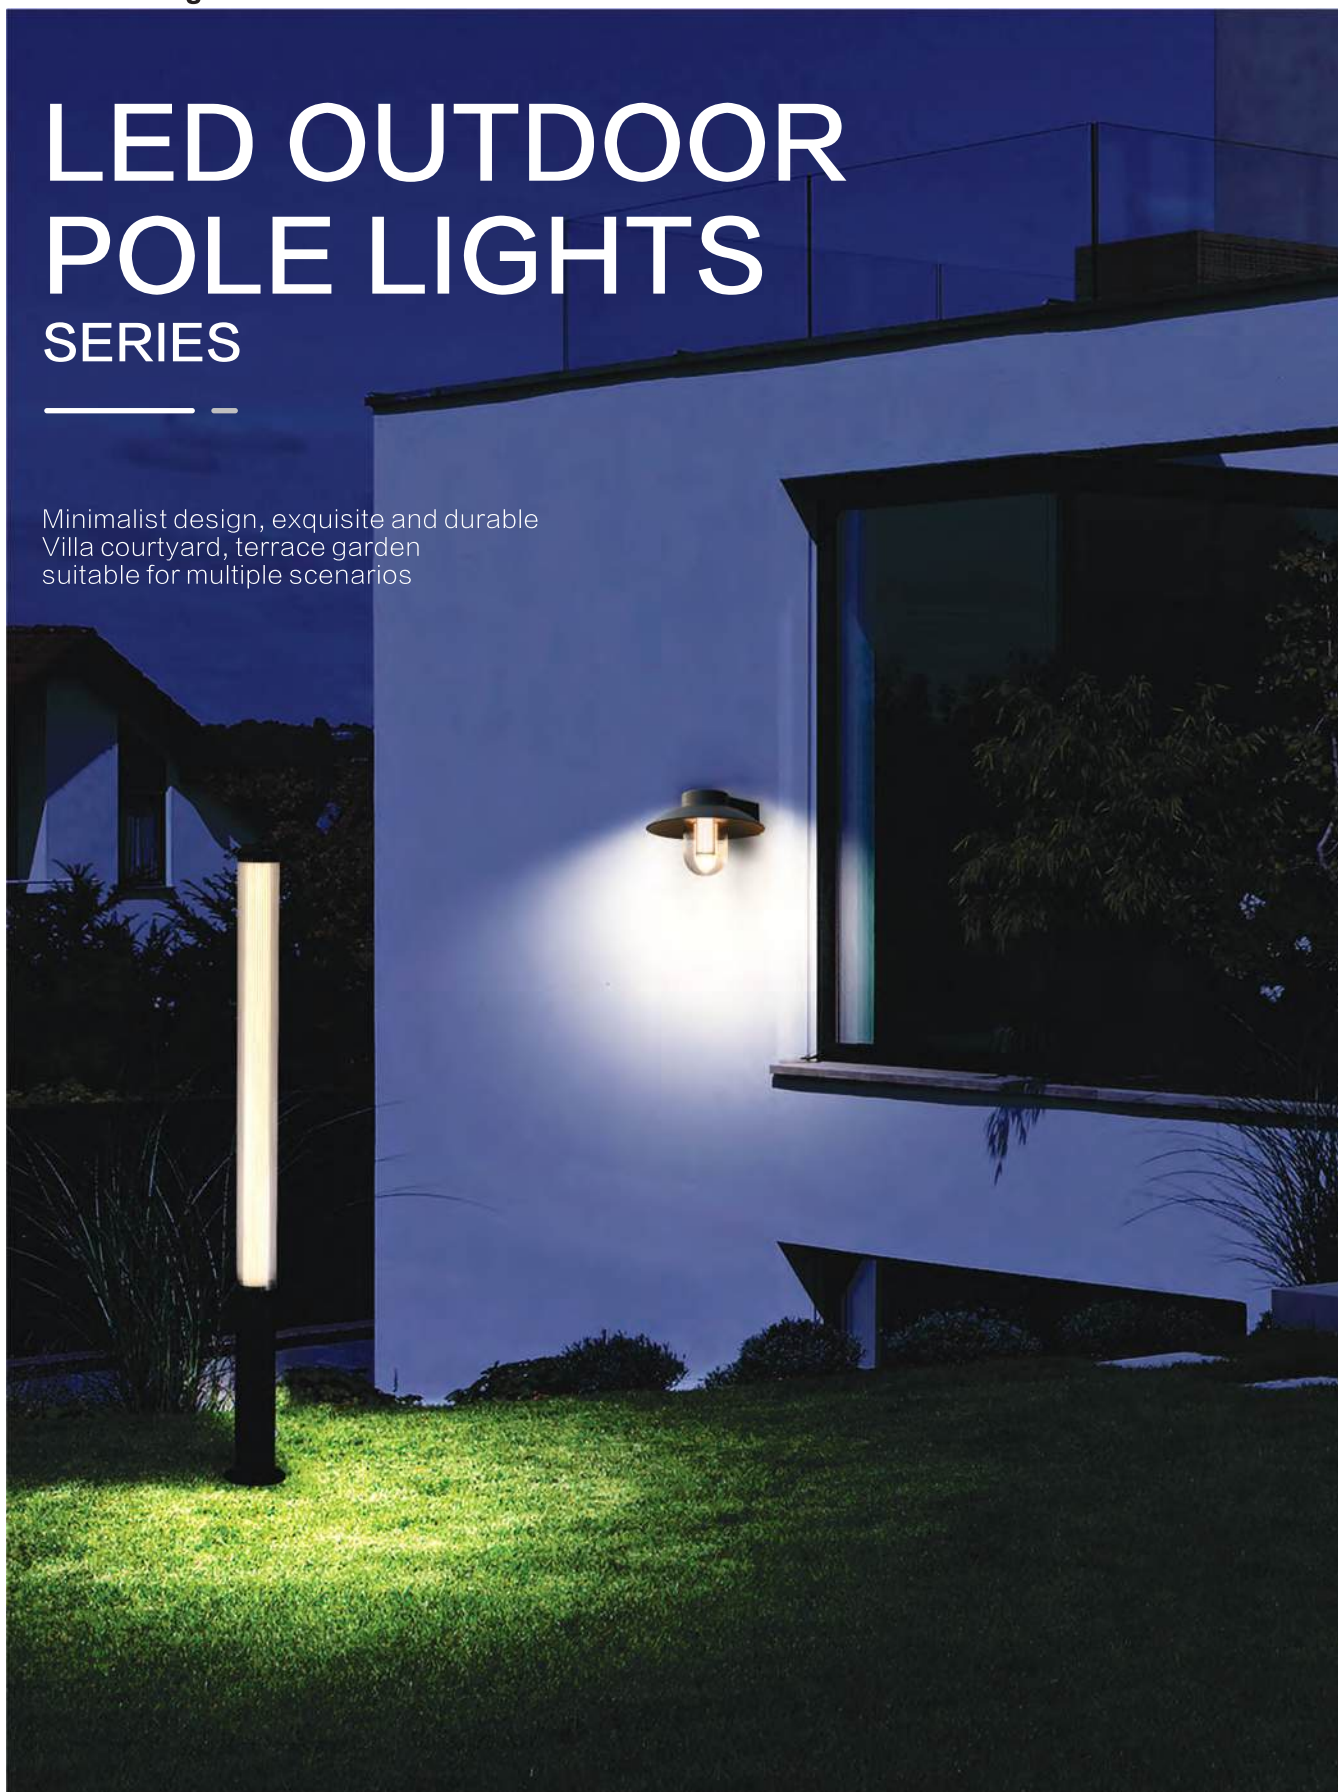

LED Pole Lights

LPL-021


RIBBED PRISMATIC

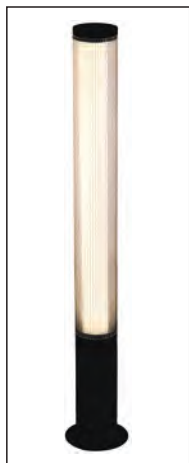

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
59W	155x1050	/	Aluminium+Acrylic	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	360°	SMD	5162.5lm	IP65	

LPL-021


RIBBED PRISMATIC



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
84W	155x1550	/	Aluminium+Acrylic	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	360°	SMD	7350lm	IP65	

LPL-023

RIBBED PRISMATIC



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
100W	155x2050	/	Aluminium+Acrylic	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	360°	SMD	8750lm	IP65	

LED OUTDOOR WOODEN FINISH - WALLITE'S

LED OUTDOOR WOODEN LIGHTS SERIES


Highlight minimalist wall lamp
Wide range of lighting/waterproof/easy to install



LED OUTDOOR WOODEN FINISH - WALLITE'S




LWO-001
UP/DOWN



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	500x65x60	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	107°	PHILIPS SMD 2835	1742lm	IP65	

LWO-002
ONEWAY




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	500x65x60	/	Aluminium+SPC	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	107°	PHILIPS SMD 2835	1263lm	IP65	

LED OUTDOOR WOODEN FINISH - WALLITE'S

LWO-003


UP/DOWN



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	250x65x60	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	PHILIPS SMD 2835	1140lm	IP65	

LWO-004


ONEWAY



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	250x65x60	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	PHILIPS SMD 2835	668lm	IP65	

LWO-005

UP/DOWN




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	250x105x110	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	112°	PHILIPS SMD 2835	416lm	IP54	

LED OUTDOOR WOODEN FINISH - WALLITE'S

LWO-006


UP/DOWN



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
14W	62x87x144	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	73°	CREE 1304	1365lm	IP54	

LWO-007


UP/DOWN



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	90x90x115	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	22°/90°	PHILIPS SMD 2835	460lm	IP54	

LWO-008

UP/DOWN




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
14W	101x58x145	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	36°	PHILIPS SMD 2835	1108lm	IP54	

LED OUTDOOR WOODEN FINISH - WALLITE'S




LWO-009
ONEWAY



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5.5W	130x42x133	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	59°	PHILIPS SMD 2835	250lm	IP65	

LWO-010
BACKLIGHT




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	125x126x250	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	66°	PHILIPS SMD 2835	234lm	IP54	

LED OUTDOOR WOODEN FINISH - BOLLARD'S




LWO-101



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	175x157x300	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	49°	PHILIPS SMD 3014	300lm	IP54	


LWO-102



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	175x157x600	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	49°	PHILIPS SMD 3014	300lm	IP54	


LED OUTDOOR WOODEN FINISH - BOLLARD'S

LWO-103




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	157x157x300	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	45°	PHILIPS SMD 4014	200lm	IP65	

LWO-104



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	157x157x600	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	45°	PHILIPS SMD 4014	200lm	IP65	


LWO-105



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	142x112x500	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	39°	PHILIPS SMD 2835	319lm	IP54	



LED OUTDOOR WOODEN FINISH - BOLLARD'S

LWO-106




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	266x100x908	/	Aluminium	Black+Wood Grain	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	50°	OSRAM	435lm	IP54	

LWO-107



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	266x100x708	/	Aluminium	Black+Wood Grain	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	50°	OSRAM	435lm	IP65	

LWO-108




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	488x100x908	/	Aluminium	Black+Wood Grain	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	50°	OSRAM	810lm	IP65	

LED Outdoor Wall Washers




LLWW-001A




Watt	Dimension(mm)	LED	Material	Body color
6W	40x60x300	EPLEDS	Aluminium+pc	Black
CCT	CRI	Beam Angle	IP	
3000K	≥80	15° /45°	IP65	

LLWW-001



Watt	Dimension(mm)	LED	Material	Body color
18W	40x60x500	Bridgelux	Aluminium+pc	Black
CCT	CRI	Beam Angle	IP	
3000K	≥70	15° /45°	IP65	


LLWW-004



Watt	Dimension(mm)	LED	Material	Body color
36W	40x60x1000	Bridgelux	Aluminium+pc	Black
CCT	CRI	Beam Angle	IP	
3000K	≥80	15° /45°	IP65	


LED Outdoor Concealed Wall Washers

LLWW 014




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
9W	300x90x75	285x75	OSRAM	201 stainless steel	3000K
CRI	Beam Angle	Lumens	IP	Body color	
≥80	15°/45°	140LM/W	IP68	stainless steel	

LLWW 015



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
18W	500x90x75	485x75	OSRAM	201 stainless steel	3000K
CRI	Beam Angle	Lumens	IP	Body color	
≥80	15°/45°	140LM/W	IP68	stainless steel	

LLWW 016




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
36W	1000x90x75	985x75	OSRAM	201 stainless steel	3000K
CRI	Beam Angle	Lumens	IP	Body color	
≥80	15°/45°	140LM/W	IP68	stainless steel	




LED Outdoor Wall Washers

LLWW-010



Watt	Dimension(mm)	LED	Material	Body color	CCT
18W	120x120x80	CREE	Aluminium+pc	Silver Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 70	5° /25°	110-120lm/w	IP65		

LLWW-012



Watt	Dimension(mm)	LED	Material	Body color	CCT
25W	120x120x80	CREE	Aluminium+pc	Silver Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 70	5° /25°	110-120lm/w	IP65		



LED Outdoor Wall Washers



LLWW-007



Watt	Dimension(mm)	LED	Material	Body color	CCT
8W	140x145x105	CREE	Die-cast Aluminium	Silver Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5°	147lm/w	IP65		

LLWW-008



Watt	Dimension(mm)	LED	Material	Body color	CCT
20W	165x165x105	CREE	Die-cast Aluminium	Silver Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5°	149lm/w	IP65		

LLWW-009



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	150x90x42	/	Aluminium	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	120X5°	CREE	180lm	IP65	

220-240V
50-60Hz


85-265V
50-60Hz



LED Outdoor Wall Washers




LLWW-019
CORNER/STAIR CASE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	92x92x125x33	/	Aluminium	Iron Gray	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	120lm	IP65	

LLWW-020
STAIR CASE / ONE DIRECTIONAL PATHWAY




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø100x38	/	Aluminium	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	360lm	IP65	

LED Outdoor Wall Washers

LLWW-017


3x6W WINDOW LIGHT



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
18W	183x70x76	/	Aluminium	Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	5°x180°	CREE	1080lm	IP65	

LLWW-018


CORNER UP/SIDE LIGHT



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	92x65x65	/	Aluminium	Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	720lm	IP65	

LLWW-021

BUILDING ELEVATION/WINDOW LIGHT ROTATABLE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	101x101x164	/	Metal	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	52°	CREE	138lm	IP54	

220-240V
50-60Hz

85-265V
50-60Hz



24V LED OUTDOOR SERIES


24V LED OUTDOOR SERIES

Engineering grade waterproofing, encapsulated with adhesive
Safe and durable, fearless of long-term sun and rain exposure




24V LED OUTDOOR SERIES

LLO24V-1




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
24W	48x38x1000	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	3120lm	IP65	

LLO24V-2



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	48x38x500	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	1560lm	IP65	


LLO24V-3



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	48x38x300	/	ALUMINIUM	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	780lm	IP65	


24V LED OUTDOOR SERIES

LLO24V-7
WITH VISOR




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
24W	28x87x1000	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	3120lm	IP65	

LLO24V-8
WITH VISOR



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	28x87x500	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	1560lm	IP65	

LLO24V-9
WITH VISOR




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	28x87x300	/	ALUMINIUM	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	780lm	IP65	

24V LED OUTDOOR SERIES

LLO24V-10


SMD LED-SLIM BODY



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	22x25x1000	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	30°/60°	OSRAM	1440lm	IP65	

LLO24V-11


SMD LED-SLIM BODY



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	22x25x500	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	30°/60°	OSRAM	720lm	IP65	

LLO24V-12


SMD LED-SLIM BODY



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	22x25x300	/	ALUMINIUM	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	30°/60°	OSRAM	360lm	IP65	


24V LED OUTDOOR SERIES

LLO24V-13




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø42x60	/	Aluminium	Iron Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	36°	OSRAM	280lm	IP65	

LLO24V-14



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	Ø60x100	/	Aluminium	Iron Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	36°	Bridgelux	760lm	IP65	


LLO24V-15



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø60x100	/	ALUMINIUM	Iron Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	36°	Bridgelux	1100lm	IP65	


24V LED OUTDOOR SERIES

LLO24V-16




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø35x60	/	Aluminium	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	220lm	IP65	

LLO24V-17



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	Ø35x85	/	Aluminium	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	15°	CREE	560lm	IP65	


LLO24V-18



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
10W	Ø49x120	/	ALUMINIUM	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	15°	CREE	900lm	IP65	


24V OUTDOOR SERIES-UNDER GROUND LIGHTS

LLO24V-19




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	Ø42x80	Ø40	Aluminium	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	36°	OSRAM	220lm	IP65	

LLO24V-20



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	Ø42x80	Ø40	Stainless Steel	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	OSRAM	220lm	IP65	


LLO24V-21



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø62x85	Ø58	Stainless Steel	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	280lm	IP65	


24V OUTDOOR SERIES-UNDER GROUND LIGHTS

LLO24V-22




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	Ø110x100	Ø100	Stainless Steel	Stainless Steel	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	380lm	IP65	

LLO24V-23



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø160x110	Ø150	Stainless Steel	Stainless Steel	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	720lm	IP65	


LLO24V-24



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
18W	Ø160x110	Ø150	Stainless Steel	Stainless Steel	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	1100lm	IP65	


IP44/54 SMD DOWN LIGHTER'S

LLF-312




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	Ø80x72	Ø72~75	Aluminium+SPU	Black/White	3000K/4000K/5000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	100°	Bridgelux	504lm	IP54	

LLF-313



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø105x82	Ø97~100	Aluminium+SPU	Black/White	3000K/4000K/5000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	100°	Bridgelux	825lm	IP54	

LLF-314




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	Ø155x92	Ø147~150	Aluminium+SPU	Black/White	3000K/4000K/5000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	100°	Bridgelux	2020lm	IP54	

IP44/54 COB DOWN LIGHTER'S




LLF-317



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	Ø68x56	/	Aluminium	Black/White	2700K/3000K/4000K/5000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	20°/30°	/	236lm	IP54	

LLF-318




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
9W	Ø65x65	/	Aluminium	Black/White	272700K/3000K/4000K/5000K00K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	20°/30°	/	557lm	IP65	

IP44/54 COB CONCEALED DOWN LIGHTER'S




IP44/54 COB CONCEALED DOWN LIGHTER'S

LLF-292




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø88x72	Ø80	Aluminium+SPU	Black	3000K/4000K/6000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	38°	Bridgelux C6	100lm	IP44	

LLF-275B



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	Ø41x82.56	Ø35	Aluminium+SPU	Black	4000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	20°	Bridgelux C6	398.72lm	IP44	

LLF-276B



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø57x100	Ø50	Aluminium+SPU	Black	4000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	20°	Bridgelux C8	934.8lm	IP44	

LED OUTDOOR HAND RAIL LIGHTS


LED OUTDOOR HAND RAIL LIGHTS SERIES

Safe and durable
Fashionable and aesthetically pleasing



LED OUTDOOR HAND RAIL LIGHTS

LHR-001




Suit for handrail Ø38~42mm,
wall thickness 1.5~2mm;
handrail Ø42~100mm,
wall thickness 1.5~6mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1.2W	M18x26	Ø17, M18x1.0	316 Stainless Steel	Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	30°	CREE	122.48lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LHR-002




Suit for handrail Ø42~48mm,
wall thickness 1.5~2mm;
handrail Ø48~100mm,
wall thickness 1.5~6mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1.2W	M18x30	Ø17, M18x1.0	316 Stainless Steel	Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	Asymmetric55°	CREE	96lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LHR-003




Suit for standard ≥50 x 50mm
square or rectangel handrail,
wall thickness 0.8-3mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1.5W	Ø33x39.5	Ø30	Aluminium	Matt Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	Asymmetric65°	CREE	100.27lm	IP67	

LED OUTDOOR HAND RAIL LIGHTS

LHR-004




Suit for handrail Ø48-52mm,
wall thickness 0.8-3.0mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1.5W	185x17.5x21	172x14.6~15	Aluminium	Matt Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	110.20lm	IP65	

Suit for class 2 power unit, maximum connected power not more than 100W

LHR-005




Suit for handrail Ø48-52mm,
wall thickness 0.8-3.0mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2.5W	285x17.5x21	272x14.6~15	Aluminium	Matt Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	183.68lm	IP65	

Suit for class 2 power unit, maximum connected power not more than 100W

LHR-006



Suit for handrail Ø48-52mm,
wall thickness 0.8-3.0mm



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
4W	124x30x32	102x28	Aluminium	Matt Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	10x100°	CREE	159.07lm	IP65	

Suit for class 2 power unit, maximum connected power not more than 100W



LED OUTDOOR SURFACE / CONCEALED / ELEVATION - UNDERGROUND-DRIVEOVER LIGHTS



LLU-001
SURFACE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
4.5W	300X24.7X20.9	28x20.9	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	303.6lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W



LLU-002
SURFACE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7.5W	500x24.74x20.9	28x20.9	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	506.25lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LLU-003
SURFACE






Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	1000x24.7x20.9	28x20.9	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	1012lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LED OUTDOOR SURFACE / CONCEALED / ELEVATION - UNDERGROUND-DRIVEOVER LIGHTS




LLU-004
CONCEALED



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
4.5W	300x24.9x44	28x44	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	318.9lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W




LLU-005
CONCEALED



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7.5W	500x24.9x44	28x44	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	531.5lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LLU-006
CONCEALED




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	1000x24.9x44	28x44	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	1063lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W


LED Outdoor Lights-economy Series

LEO-001




Watt	Dimension(mm)	LED	Material	Body color	CCT
6W	63x83	CREE	Aluminium	Dark Grey	3000/2200K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	80lm/w	IP65		

LEO-002



Watt	Dimension(mm)	LED	Material	Body color	CCT
12W	83x97	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	80lm/w	IP65		

LEO-020




Watt	Dimension(mm)	LED	Material	Body color	CCT
3W	85x90	Bridgelux	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	80lm/w	IP54		




LED Outdoor Lights-economy Series

LEO-018




Watt	Dimension(mm)	LED	Material	Body color	CCT
3W	43x65	Bridgelux	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	24°	80lm/w	IP54		

LEO-019



Watt	Dimension(mm)	LED	Material	Body color	CCT
3W	43x65	Bridgelux	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	80lm/w	IP54		

LEO-021




Watt	Dimension(mm)	LED	Material	Body color	CCT
5W	130x65	Bridgelux	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	80lm/w	IP54		




LED Outdoor Lights-economy Series

LEO-003



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
6W	100x80	90	CREE	Aluminium	2700K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	60°	130lm/w	IP65	Stainless Steel	

LEO-004



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
12W	150x95	105x110	CREE	Aluminium	2700K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	36°	130lm/w	IP65	Stainless Steel	

LEO-110

Under Ground Wall Washer




Watt	Dimension(mm)	Cut-Out(mm)	LED Chip	Material	CCT
10W	88x83	/	Bridgelux	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
>80	45°	950-1000lm	IP54	San Black / Bright Silver	



LED Outdoor Lights-economy Series




LEO-012




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
3W	42x82	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	60°	300-310lm	IP54	Dark Grey	

LEO-012A



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
2W	42x82	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	60°	80lm/w	IP54	Dark Grey	

LEO-013



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
3W	42x82	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	60°	300-310lm	IP54	Dark Grey	


36V
270mA

85-265V
50-60Hz

EPISTAR



LED Outdoor Lights-economy Series

LEO-014




Watt	Dimension (mm)	Cut-Out (mm)	LED chip	Material	CCT
3W	62x85	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	60°	300-310lm	IP54	Dark Grey	

LEO-015




Watt	Dimension (mm)	Cut-Out (mm)	LED chip	Material	CCT
3W	62x85	42	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	60°	300-310lm	IP54	Dark Grey	

LEO-016



Watt	Dimension (mm)	Cut-Out (mm)	LED	Material	CCT
3W	42x80	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	60°	300-310lm	IP54	Dark Grey	


LEO-017



Watt	Dimension (mm)	Cut-Out (mm)	LED	Material	CCT
3W	42x42x80	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	60°	300-310lm	IP54	Dark Grey	


LED Outdoor Lights-economy Series

LEO-005




Watt	Dimension(mm)	LED	Material	Body color	CCT
6W	173x54x60	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15° / 36°	80lm/w	IP44		

LEO-006



Watt	Dimension(mm)	LED	Material	Body color	CCT
4x3W	100x100x51	CREE	Aluminium	Dark Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	80lm/w	IP44		

LEO-007



Watt	Dimension(mm)	LED	Material	Body color	CCT
4x3W	100x100x51	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15°	80lm/w	IP44		

LEO-006A




NARROW / WIDE BEAM



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	Ø120x56	/	Aluminium	Sand Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	40° & 5°	High Power	80lm/w	IP54	


LED Outdoor Lights-economy Series

LEO-008





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	92x70	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	120°	80lm/w	IP44		

LEO-009




Watt	Dimension(mm)	LED	Material	Body color	CCT
4W	150x70	CREE	Aluminium	Dark Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	120°	80lm/w	IP44		

LEO-010



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	76x81x63	CREE	Aluminium	Dark Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	36°	80lm/w	IP44		


LEO-011



Watt	Dimension(mm)	LED	Material	Body color	CCT
2x3W	142x81x63	CREE	Aluminium	Dark Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	36°	80lm/w	IP44		


LED Outdoor Lights-economy Series

LEO-032




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	40x40x120	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5°	360-400lm	IP54		

LEO-033




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	40x60x90	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5°	360-400lm	IP54		

LEO-032A




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	40x60x120	Bridgelux	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	10/60°	500-550lm	IP54		

LEO-032B



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	40x60x120	Bridgelux	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	500-550lm	IP54		


LEO-033A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	40x60x90	Bridgelux	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	250-270lm	IP54		



LED Outdoor Lights-economy Series

LEO-035



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	66x70x42	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	300-310lm	IP54		

LEO-036




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	88x70x42	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	540-600lm	IP54		




LED Outdoor Lights-economy Series

LEO-049




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	80x60x35	EPISTAR-COB	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	85°	240lm	IP54		

LEO-050




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	80x60x35	EPISTAR-COB	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	85°	480lm	IP54		

LEO-051



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	90x50	EPISTAR-COB	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	85°	480lm	IP54		

LEO-052



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x3W	90x50	EPISTAR-COB	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	85°	960lm	IP54		

LEO-109 STREAKS ON WALL



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
10W	168x150x124	/	Aluminium	sand Grey	3000K
CRI	Beam Angle	Luminous Flux	LED chip	IP	
>80	90x90°	800lm	Bridgelux	IP67	


85-265V
50-60Hz

EPISTAR

LED Outdoor Lights-economy Series




LEO-045



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	47x70x170	EPISTAR	Aluminium+pc	Black/White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	788lm	IP54		


LEO-046



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	47x70x210	EPISTAR	Aluminium+pc	Black/White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	1442lm	IP54		


LED Outdoor Lights-economy Series

LEO-037




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	90x46	EPISTAR SMD 2835	Aluminium+pc	Black	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	180°	95-100lm/w	IP54		

LEO-038




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
16W	140x46	EPISTAR SMD 2835	Aluminium+pc	Black	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	180°	95-100lm/w	IP54		

LEO-039



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	90x90x46	EPISTAR SMD 2835	Aluminium+pc	Black	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	180°	95-100lm/w	IP54		

LEO-040



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
16W	140x140x46	EPISTAR SMD 2835	Aluminium+pc	Black	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	180°	95-100lm/w	IP54		

LED Outdoor Surface Fixtures-economy Series




EPISTAR

85-265V
50-60Hz


LED Outdoor Surface Fixtures-economy Series

LEO-053




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
14W	90x136	CREE	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	36°	1120lm	IP54		

LEO-054




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
14W	90x90x136	CREE	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	36°	1120lm	IP54		

LEO-055




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
21W	145x140	CREE	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	36°	1680lm	IP54		




LED Outdoor Lights-economy Series

LEO-024




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	80x80x40	72x72	Bridgelux	Aluminium	Dark Grey/White
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	60°	240-260lm	IP54	3000K	

LEO-025



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	80x80x40	72x72	Bridgelux	Aluminium	Dark Grey/White
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	60°	240-260lm	IP54	3000K	

LEO-034




Watt	Dimension(mm)	Cut-Out(mm)	LED	Material	Body color
3W	60x60x35	45x45	Bridgelux	Aluminium	Dark Grey/White
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	90°	270-280lm	IP54	3000K	




LED Outdoor Lights-economy Series

LEO-041




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
2W	114x114x65	114x105x60	CREE XBD	Aluminium	Dark Grey
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	30°	80lm/w	IP65	3000K	

LEO-042




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
4W	170x114x65	170x105x60	CREE XBD	Aluminium	Dark Grey
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	30°	80lm/w	IP65	3000K	

LEO-043




Watt	Dimension(mm)	Cut-Out(mm)	LED	Material	Body color
6W	226x114x65	226x105x60	CREE XBD	Aluminium	Dark Grey
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	30°	80lm/w	IP65	3000K	

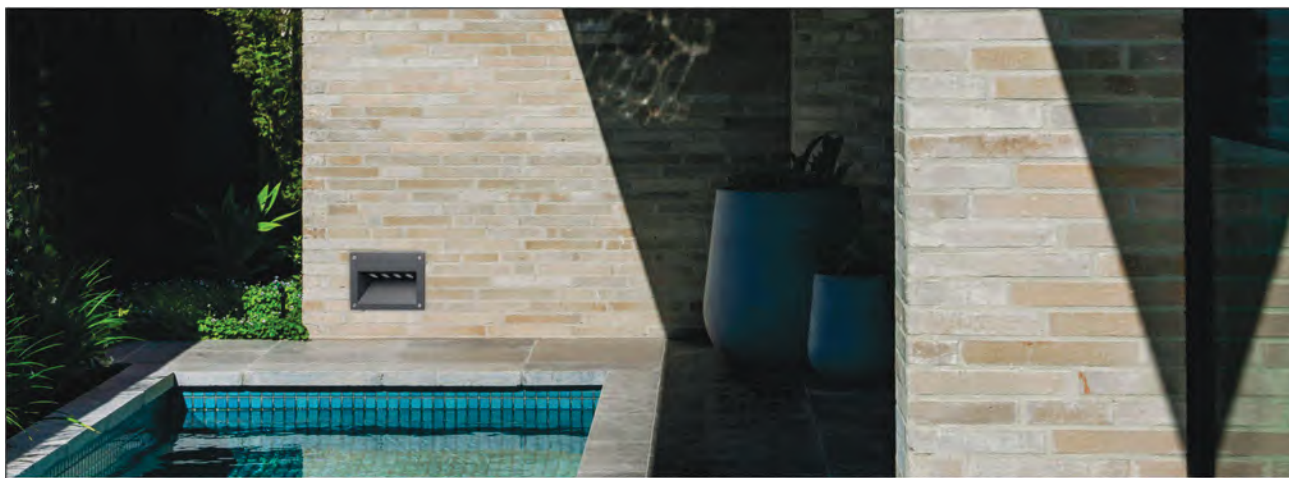

LED Outdoor Lights-economy Series




LEO-100




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	65x80	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	130lm/w	IP68	24V	

LEO-101



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	82x140	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	130lm/w	IP68	24V	

LEO-102




Watt	Dimension(mm)	LED	Material	Body color	CCT
6W	120x140	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	130lm/w	IP68	24V	

- 1: Not to be switched on(Even for testing purpose)if the fixture is not under water
2: not to cut the IP68 cable provided by the manufacturer

LED Outdoor Lights-economy Series




LEO-102A




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	120x140	EPILEDs	304 stainless steel	Stainless Steel	RGB DMX512
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	112lm/w	IP68	24V	

LEO-103



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	145x180	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	80lm/w	IP68	24V	


LEO-103A



Watt	Dimension(mm)	LED	Material	Body color	CCT
12W	145x180	EPILEDs	304 stainless steel	Stainless Steel	RGB DMX512
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	112lm/w	IP68	24V	


LED Outdoor Lights-economy Series

LEO-104



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	160x85	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	130lm/w	IP68	24V	

LEO-105



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	100x90	88	Bridgelux	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	Voltage	CCT
≥80	15°	130lm/w	IP68	24V	2700K

LED Outdoor Lights-economy Series


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs



- 1: Not to be switched on(Even for testing purpose)if the fixture is not under water
- 2: not to cut the IP68 cable provided by the manufacturer


LED Outdoor Lights-economy Series

LEO-106A




Watt	Dimension(mm)	Cut-Out(mm)	LED	Material	Body color
6W	120x90	110-100	EPISTAR	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	CCT	Voltage
≥80	15°	112lm/w	IP68	RGB DM512	24V

LEO-106




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	120x90	108	EPISTAR	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	CCT	Voltage
≥80	15°	130lm/w	IP68	RGB	24V

LEO-107A



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
12W	150x95	136	EPISTAR	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	CCT	Voltage
≥80	15°	112lm/w	IP68	RGB DMX512	24V

LEO-107



Watt	Dimension(mm)	Cut-Out(mm)	LED	Material	Body color
12W	150x95	136	Bridgelux	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	CCT	Voltage
≥80	15°	130lm/w	IP68	3000K	24V

1: Not to be switched on(Even for testing purpose)if the fixture is not under water
2: not to cut the IP68 cable provided by the manufacturer



IP54



IP65



IP68

24V
50Hz


bridgelux

EPISTAR

LED Outdoor Flood Lights




LFL-001




Watt	Dimension(mm)	LED	Material	Body color
10W	110x130x38	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K/RED/ BLUE/GREEN	≥80	110°	100lm/w	IP65

LFL-001A




Watt	Dimension(mm)	LED	Material	Body color
10W	110x130x38	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
RGB	≥80	110°	100lm/w	IP65

LFL-002A



Watt	Dimension(mm)	LED	Material	Body color
20W	183x155x55	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
RGB	≥80	110°	100lm/w	IP65

LFL-002




Watt	Dimension(mm)	LED	Material	Body color
20W	183x155x55	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K/RED/ BLUE/GREEN	≥80	110°	100lm/w	IP65



100-240V
50-60Hz


LED Outdoor Flood Lights

LFL-003




Watt	Dimension(mm)	LED	Material	Body color
30W	200x171x52	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K	≥80	110°	100lm/w	IP65

LFL-004




Watt	Dimension(mm)	LED	Material	Body color
50W	248x200x61	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K/RED /BLUE/GREEN	≥80	110°	100lm/w	IP65

LFL-004A




Watt	Dimension(mm)	LED	Material	Body color
50W	248x200x61	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
RGB	≥80	110°	100lm/w	IP65

LFL-005



Watt	Dimension(mm)	LED	Material	Body color
100W	283x256x70	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K	≥80	110°	100lm/w	IP65

LFL-006




Watt	Dimension(mm)	LED	Material	Body color
200W	350x310x92	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K	≥80	110°	100lm/w	IP65

LED Outdoor Flood Lights



LFL-030




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	120x100x25	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

185-300V


LED Outdoor Flood Lights

LFL-031




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
30W	140x120x30	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

LFL-032




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
50W	180x160x30	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

LFL-033




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
100W	300x265x35	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

LFL-034



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
150W	300x265x35	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

LFL-035




Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
200W	360x320x40	SANAN	Aluminium	Black	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP65		

LED Outdoor Flood Lights




LFL-036



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
30W	126x180x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-100lm/w	IP66	

LFL-037




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
50W	140x200x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-110lm/w	IP66	



100-240V
50-60Hz


LED Outdoor Flood Lights

LFL-038




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
100W	196x280x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-110lm/w	IP66	

LFL-039



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
150W	230x330x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-110lm/w	IP66	

LFL-040




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
200W	245x350x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-110lm/w	IP66	

LED Outdoor Flood Lights




LFL-011



Watt	Dimension(mm)	LED	Material	Body color	CCT
10W	125x117x37	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-012




Watt	Dimension(mm)	LED	Material	Body color	CCT
20W	150x140x40	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		



100-240V
50-60Hz


LED Outdoor Flood Lights

LFL-013




Watt	Dimension(mm)	LED	Material	Body color	CCT
30W	180x170x40	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-014




Watt	Dimension(mm)	LED	Material	Body color	CCT
50W	244.5x234.5x52.5	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-015



Watt	Dimension(mm)	LED	Material	Body color	CCT
100W	280x270x54.5	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-016



Watt	Dimension(mm)	LED	Material	Body color	CCT
200W	345x335x84	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LED Outdoor Flood Lights




LFL-017-020



100-240V
50-60Hz


LED Outdoor Flood Lights

LFL-017




Watt	Dimension(mm)	LED	Material	Body color	CCT
30W	210x150x30	Sanan 2835	Die-cast Aluminium+glass	White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-018




Watt	Dimension(mm)	LED	Material	Body color	CCT
50W	245x190x35	Sanan 2835	Die-cast Aluminium+glass	White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-019



Watt	Dimension(mm)	LED	Material	Body color	CCT
100W	320x250x45	Sanan 2835	Die-cast Aluminium+glass	White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-020



Watt	Dimension(mm)	LED	Material	Body color	CCT
150W	380x300x60	Sanan 2835	Die-cast Aluminium+glass	White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		


LED Street Lights



100-240V
50-60Hz


LED Street Lights

LST-001




Watt	Dimension(mm)	LED	Material	Body color	CCT
18W	260x120x62	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		

LST-002



Watt	Dimension(mm)	LED	Material	Body color	CCT
24W	290x122x65	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		

LST-003




Watt	Dimension(mm)	LED	Material	Body color	CCT
36W	320x130x65	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		

LST-004



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
50W	365x125x55	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		

LST-005



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
100W	440x183x85	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		



IMPORTED AND MARKETING BY/CUSTOMER CARE ADDRESS
LED Lum Lighting Solutions LLP

#22A, 7th Street, Sector 3, Ambattur Industrial Estate,
Ambattur, Chennai-600098

Landline : +91 44 4852 8068, 4852 8069,

Mobile : +91 97907 99997, Customer Care : +91 96631 02951,

Email : ledlumlighting@gmail.com, Web : www.ledlumlighting.com