



Lighting.Simplified

NEW PRODUCTS

2024



LB-200

BOLLARDS

Watts	9W
Material	Aluminum / PC
Dimension	Ø160 X 300 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	BRIDGELUX
Beam Angle	90°
IP Rating	IP 65
Lumens	955 lm
CRI	≥ 80
D.P	R.s. 7225



LB-201

BOLLARDS

Watts	9W
Material	Aluminum / PC
Dimension	Ø160 X 500 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	BRIDGELUX
Beam Angle	90°
IP Rating	IP 65
Lumens	955 lm
CRI	≥ 80
D.P	R.s. 8250



LB-202

BOLLARDS

Watts	9W
Material	Aluminum / PC
Dimension	Ø160 X 700 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	BRIDGELUX
Beam Angle	90°
IP Rating	IP 65
Lumens	955 lm
CRI	≥ 80
D.P	R.s. 9275



360°
ROTATABLE

LB-203

BOLLARDS

Watts	10W
Material	Aluminum / PC
Dimension	Ø110 X 500 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	BRIDGELUX
Beam Angle	265°
IP Rating	IP 65
Lumens	625 lm
CRI	≥ 80
D.P	R.s. 11900



360°
ROTATABLE

LB-204

BOLLARDS

Watts	10W
Material	Aluminum / PC
Dimension	Ø110 X 900 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	BRIDGELUX
Beam Angle	265°
IP Rating	IP 65
Lumens	625 lm
CRI	≥ 80
D.P	R.s. 14325



LB-205

BOLLARDS

Watts	10W
Material	Aluminum / PC
Dimension	Ø145 X 500 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	BRIDGELUX
Beam Angle	146°
IP Rating	IP 65
Lumens	875 lm
CRI	≥ 80
D.P	R.s. 11500



LB-206

BOLLARDS

Watts	10W
Material	Aluminum / PC
Dimension	Ø145 X 900 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	BRIDGELUX
Beam Angle	146°
IP Rating	IP 65
Lumens	875 lm
CRI	≥ 80
D.P	R.s. 13900



4M x 12M
THROW

LB-207

BOLLARDS

Watts	1 x 12W
Material	Aluminum / Glass
Dimension	Ø130 X 150 x 500 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	CREE
Beam Angle	20°
IP Rating	IP 65
Lumens	767 lm
CRI	≥ 80
D.P	R.s. 11150



4M x 12M
THROW

LB-208

BOLLARDS

Watts	1 x 12W
Material	Aluminum / Glass
Dimension	Ø130 X 150 x 900 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	CREE
Beam Angle	36°
IP Rating	IP 65
Lumens	838 lm
CRI	≥ 80
D.P	R.s. 13450



DOTS ON
FLOOR

LB-211

BOLLARDS

Watts	1 x 7W
Material	Aluminum / PC
Dimension	Ø121 X 200 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	CREE
Beam Angle	123°
IP Rating	IP 65
Luminous	43 lm/w
CRI	≥ 80
D.P	R.s. 6575



MOVABLE HEAD
BOLLARD
WITH SPIKE

LB-212

BOLLARDS

Watts	12W
Material	Aluminum + PC
Dimension	Ø110 X 110 X 500 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	EPISTAR
Beam Angle	120°
IP Rating	IP 54
Lumens	600 lm
CRI	≥ 80
D.P	R.s. 4550



MOVABLE HEAD
BOLLARD
WITH SPIKE

LB-213

BOLLARDS

Watts	12W
Material	Aluminum + PC
Dimension	Ø110 X 110 X 900 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	EPISTAR
Beam Angle	120°
IP Rating	IP 54
Lumens	600 lm
CRI	≥ 80
D.P	R.s. 5000



MOVABLE HEAD
BOLLARD
WITH SPIKE

LB-214

BOLLARDS

Watts	12W
Material	Aluminum + PC
Dimension	Ø110 X 110 X 1300 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	EPISTAR
Beam Angle	120°
IP Rating	IP 54
Lumens	600 lm
CRI	≥ 80
D.P	R.s. 5650



MOVABLE HEAD
BOLLARD
WITH BASE

LB-215

BOLLARDS

Watts	12W
Material	Aluminum + PC
Dimension	Ø110 X 110 X 1300 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	EPISTAR
Beam Angle	120°
IP Rating	IP 54
Lumens	600 lm
CRI	≥ 80
D.P	R.s. 7700



BACK LIGHT

LLO-1001

WALL LIGHTS

Watts	9W
Material	Aluminum / PC
Dimension	Ø160 X 112 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	SMD LED
Beam Angle	90°
IP Rating	IP 65
Lumens	955 lm
CRI	≥ 80
D.P	R.s. 5200



100°
ROTATABLE
UP/DOWN LIGHT

LLO-1002

WALL LIGHTS

Watts	10W
Material	Aluminum / PC
Dimension	Ø140 X 140 X 94 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	SMD LED / HI POWER
Beam Angle	82° / 90°
IP Rating	IP 65
Lumens	719 - 836 lm
CRI	≥ 80
D.P	R.s. 8250

DOT EFFECT
ON WALL



LLO-1003

WALL LIGHTS

Watts	1 X 7W
Material	Aluminum / PC
Dimension	Ø121 X 103 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	CREE
Beam Angle	123°
IP Rating	IP 54
Luminous	43 lm/w
CRI	≥ 80
D.P	R.s. 5475

MOVABLE
HEAD



LLO-1004

WALL LIGHTS

Watts	12W
Material	Aluminum + PC
Dimension	Ø172 X 110 X 137 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	EPISTAR
Beam Angle	120°
IP Rating	IP 54
Lumens	600 lm
CRI	≥ 80
D.P	R.s. 3800



SUSPENDED
MOVABLE
HEAD

LLO-1005

WALL LIGHTS


Watts	12W
Material	Aluminum + PC
Dimension	Ø110 X 110 X 700 mm
Body Color	Dark Gray
CCT (K)	3000 K
Powered by	EPISTAR
Beam Angle	120°
IP Rating	IP 54
Lumens	600 lm
CRI	≥ 80
D.P	R.s. 4350



LPL-024

POLE LIGHT

Watts	E27 Max.60 W
Material	Aluminum + Glass
Dimension	Ø230 X 230 X 1350 mm
Body Color	Dark Gray
CCT (K)	-
Powered by	-
Beam Angle	-
IP Rating	IP 44
Luminous	-
CRI	-
D.P	R.s. 8150

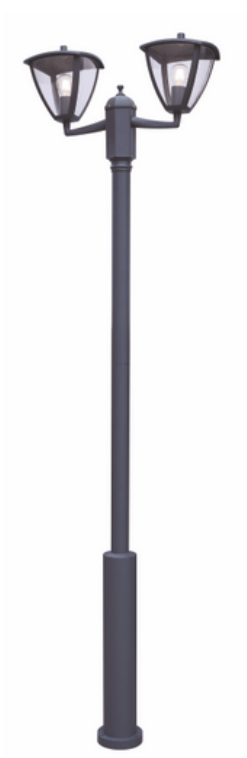

LPL-025

POLE LIGHT

Watts	E27 Max.2x60 W
Material	Aluminum + Glass
Dimension	Ø602 X 230 X 2300 mm
Body Color	Dark Gray
CCT (K)	-
Powered by	-
Beam Angle	-
IP Rating	IP 44
Luminous	-
CRI	-
D.P	R.s. 19300



LPL-026

POLE LIGHT

Watts	E27 Max.3x60 W
Material	Aluminum / Glass
Dimension	Ø530 X 530 X 2300 mm
Body Color	Dark Gray
CCT (K)	-
Powered by	-
Beam Angle	-
IP Rating	IP 44
Luminous	-
CRI	-
D.P	R.s. 23750



LWL-062

WALL LIGHT

Watts	E27 Max.60 W
Material	Aluminum + PC
Dimension	Ø292 X 230 X 308 mm
Body Color	Dark Gray
CCT (K)	-
Powered by	-
Beam Angle	-
IP Rating	IP 44
Luminous	-
CRI	-
D.P	R.s. 4400