

Reborn Everyday With Hot Water

WE JUST MAKE WATER HEATERS, AND WE BETTER FOR YOU.









BRINGING OVER — 60 YEARS OF TRUST

Nacold

Reborn Everyday With Hot Water

Racold is India's most trusted brand (as per Brand Trust Report 2016) and one of the largest providers of water heating solutions for over 60 years in India. It is a fully owned subsidiary of the Ariston Group-Italy, the world leaders in the water and environmental heating solutions. Ever since its inception, Racold, has been setting standards in the Indian Water Heating Industry by bringing in new technology, enhancing the aesthetics, quality, safety, durability and performance of the product.

Racold has set a new benchmark in the industry for energy efficiency standards and has the distinction of being the only brand in the water heating category to win the BEE award for the 10th time.

Racold is the only brand in the water heating category to be chosen as Superbrand for 2019 & 2021.

WHY CHOOSE

— RACOLD FOR → WATER HEATING?



60 Years of Excellence

Delivering breakthrough innovation, quality water heating solutions and complete customer satisfaction for over 60 years.

10 Times BEE Award Winner (2010-2020)

We place energy efficiency at the heart of our sustainable growth strategy and are deeply committed to energy conservation.





Safety Foremost

Racold Water Heaters have multiple measures for safety against high temperature and pressure. Equipped with features that ensure thermal stability and prevent chances of hazards.

Selected Superbrand

Racold is the only brand in the water heating category to be chosen as Superbrand for 2019 & 2021.





Always At Your Service

With our network of more than 1000 service technicians, 400 service centers across the country & 24/7 WhatsApp chat services, its always easy to reach out to us.

Stay Assured For 7 Years

Our 7-year warranty is a special commitment to provide only the highest standard in water heating to you.



REVOLUTIONARY FEATURES OF RACOLD



BETTER CONTROL & ENERGY SAVING

Making water heating easier at every step with our smart features.

Wi-Fi CONNECT

Get ease of control anywhere and anytime with Wi-Fi connect.



)

SMART BATH LOGIC

Customise your bathing experience with Smart Bath Logic.

LIGHTNING FAST HEATING

High powered heating element that provides hot water instantaneously.





QUICK FUNCTION

Set maximum heating temperature with a press of a button. Override temperature settings to get hot water quickly with one-press process.

ECO FUNCTION


One of our unique set of features, specifically designed to minimize the energy consumption.



FLEXOMIX

Unique inlet flow controls the system to deliver energy efficiency by producing 10%* more hot water.

REVOLUTIONARY FEATURES OF RACOLD

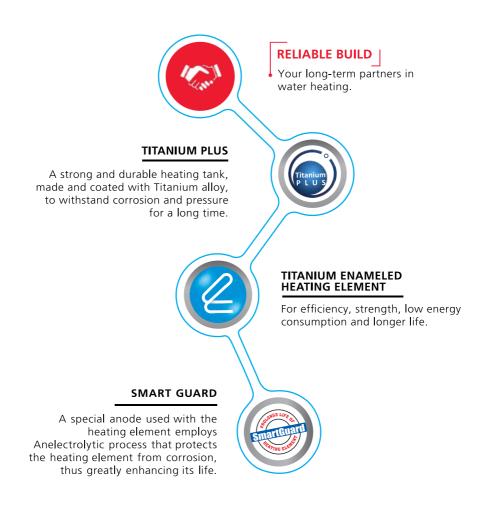



Compact and space-saving designs for modern urban spaces.



SMART SIZES

Efficient water heating in utilitarian and compact sizes.

REVOLUTIONARY FEATURES OF RACOLD



SAFETY ASSURED

Experience the power of hot water with a complete peace of mind.

AUTO DIAGNOSIS

An advanced microprocessor that safeguards the water heater to ensure complete safety of your family.



(((·O₂¹)))

OXYGEN DEPLETING SENSOR

Safety sensor that immediately turns-off water heating in case of oxygen depletion to prevent any potential hazard.

DOUBLE SOLENOID VALVE

Advanced feature that delivers twice the safety with two solenoid valves.





SAFETY PLUS

A thermostat, multi-function safety valves and cutout for multiple level of safety against high temperature and pressure.

SILVER-ION TECHNOLOGY

It actively stops proliferation of bacteria to provide healthy and clean bathing water.





Omnis[™] Wi-Fi

Omnis Wi-Fi Storage

With enhanced titanium coating

NSTALLATI#N - PIPES

NSTALLATI**Ø**N + PIPES

15L | 25L

230 Volts AC, 50 Hz. Single Phase

2kW

Wall Mounting

Max. Rate Pressure (Bar) **Installation Type**

Hard water compliance

Dimensions (in mm)

Capacity Length/Width 447 Depth 324 386

All models available in

Model

Capacity Power Supply

Wattage (kW)

Type



Black

Wi-Fi Connect

Get ease of control anywhere and anytime with Wi-Fi Connect.

Warranty

Product	2yrs.
Heating Element	4yrs.
Inner Tank	7yrs.

5-Star - 25L | 4-Star - 15L

Omnis[™] Lux

Model Omnis Lux Type

Hard water compliance Capacity

Power Supply Wattage (kW)

Max. Rate Pressure (Bar) Installation Type

Dimensions (in mm)

Storage

With enhanced titanium coating 10L | 15L | 25L

230 Volts AC, 50 Hz. Single Phase 2kW

Wall Mounting

Capacity	10L	15L	25L
Length/Width	360	360	447
Depth	276	324	386

All models available in







Warranty

,	
Product	2yrs.
Heating Element	4yrs.
Inner Tank	7yrs.

5-Star - 25L | 4-Star - 15L / 10L

Smart Control Technology

Combination of high-tech features like Smart Bath Logic, Auto Diagnosis and Eco Function for personalised hot shower and huge energy saving.



Omnis[™] Lux Plus Omnis Lux Plus

10L | 15L | 25L

INSTALLATI#N + PIPES

Model Type

Storage With enhanced titanium coating

Hard Water Compliance Capacity

Power Supply Wattage (kW) Max. Rate Pressure (Bar)

Installation Type

Wall Mounting

Dimensions (in mm)

Capacity 10L 15L 25L Length/Width 360 360 447 Depth 276 324 386

230 Volts AC, 50 Hz. Single Phase

All models available in



2kW

Grey

vvarranty	MORE ANNUES
Product	2yrs.
Heating Element	4yrs.
Inner Tank	7yrs.

5-Star - 25L | 4-Star - 10L / 15L

Silver Ion Technology

It actively stops proliferation of bacteria to provide healthy and clean bathing water.



Andris Uno

Mode Type

Hard water compliance

Capacity **Power Supply**

Wattage (kW) Max. Rate Pressure (Bar)

Installation Type

Andris Uno

Storage

With enhanced titanium coating

10L | 15L | 25L

230 Volts AC, 50 Hz. Single Phase 2kW

Wall Mounting

Dimensions (in mm)

Capacity	10L	15L	25L
Length/Width	360	360	447
Depth	278	326	390

All models available in



White Body with Black Panel



White Body with Sandy Panel

INSTALLATIZE!

+ PIPES

Warranty

warranty	
Product	2yrs.
Heating Element	3yrs.
Inner Tank	7yrs.

5-Star - 25L | 4-Star - 15L / 10L

Titanium Plus

Special grade steel with Titanium Enamel Coating gives the tank high durability and superior pressure withstanding capacity.



Andris Lux Plus

Type Hard water compliance

Model

Capacity **Power Supply**

Wattage (kW) Max. Rate Pressure (Bar)

Installation Type

Andris Lux Plus Storage

With enhanced titanium coating

10L | 15L | 25L

230 Volts AC, 50 Hz. Single Phase

NSTALLATI∰N + PIPES

NSTALLATIがA - PIPES

2kW

Wall Mounting

Dimensions (in mm)

Capacity	10L	15L	25L
Length/Width	360	360	447
Depth	298	346	410


All Models Available in



White Body with Sandy Panel

Silver Ion Technology

It actively stops proliferation of bacteria to provide healthy and clean bathing water.



2yrs.

Warranty

Product



Andris Slim

Storage

20L | 30L

Andris Slim**

Model Type

Hard water compliance

Capacity **Power Supply** Wattage (kW)

Max. Rate Pressure (Bar) **Installation Type**

230 Volts AC, 50 Hz. Single Phase 2.5kW

Horizontal Wall Mounting

		-
Capacity	20L	30L
Length	700	754
Width	280	335
Depth	302	340

With enhanced titanium coating

Dimensions (in mm)



White body with black panel

All Models Available in

Space Saving

Compact and utilitarian design for urban bath spaces.

4-Star - 20L / 30L

Warranty Product 2yrs. Heating Element 3yrs. Inner Tank 7vrs.

^{**}Star label obtained as per BEE guidelines considering 15 Ltr and 25 Ltr capacities for 20 Ltr and 30 Ltr products respectively.



Platinum Plus

ModelPlatinum PlusTypeStorage

Hard water compliance With enhanced titanium coating Capacity 50L | 100L

Power Supply 230 Volts AC, 50 Hz. Single Phase Wattage (kW) 3kW
Max. Rate Pressure (Bar) 8

Installation Type Vertical Wall Mounting

	Capacity	50L	TOOL	l
	Length	613	993	
Dimensions (in mm)	Width	493	493	
	Depth	499	499	
				٠.

All Models Available in

White

Warranty

Product	2yrs.
Heating Element	3yrs.
Inner Tank	7yrs.

5-Star - 50L / 100L

Compact design with larger capacity

New elegant and compact design with rare combination of technology and style.



Warranty

Warranty	ACCES ALCOHOLO AP
Product	2yrs.
Heating Element	3yrs.
Inner Tank	7yrs.

4-Star - 50L / 70L

Platinum Eco

Model Platinum Eco
Type Storage
With enhanced titanium coating
50L | 70L

Power Supply 230 Volts AC, 50 Hz. Single Phase Wattage (kW) 3kW

Max. Rate Pressure (Bar) 8
Installation Type Vertical Wall Mounting

Camarita F

	Capacity	50L	/0L
Dimensions (in mm)	Length	560	760
	Width	470	470
	Depth	485	485

All Models Available in



White

33%" Faster Heating

The high power 3kW heating element ensures you get hot water in no time.



NSTALLATI∰N + PIPES



Warranty

Product	2yrs.
Heating Element	2yrs.
Inner Tank	7yrs.

5-Star (All Vertical Models)

CDR Dix Plus

Model Type Hard water compliance Capacity **Power Supply** Wattage (kW) Max. Rate Pressure (Bar)

Installation Type

Dimensions (in mm)

CDR DIx Plus Storage

With enhanced titanium coating 10L | 15L | 25L | 35L

+ PIPES

230 Volts AC, 50 Hz. Single Phase 2kW

Vertical Wall Mounting

Capacity	10L	15L	25L	35L
Length	442	562	513	655
Width	290	290	367	367
Depth	303	303	380	380

All Models Available in



White with Grey Domes

Temprature Indicator & Knob Control

Equipped with a temprature indicator and a knob to control.



Warranty	* ¥
Product	2yrs.
Heating Element	2yrs.
Inner Tank	5yrs.

5-Star (All Vertical Models) 4-Star - 15L / 25L & 3-Star 10L / 35L (All Horizontal Models)

CDR DIx

Model Туре Hard water compliance Capacity **Power Supply** Wattage (kW) Max, Rate Pressure (Bar)

CDR DIx Storage

With enhanced titanium coating 10L | 15L | 25L | 35L

230 Volts AC, 50 Hz. Single Phase

2kW

Vertical / Horizontal Wall Mounting (Loft Friendly) Horizontal available in Right, Left, I/O configuration

Capacity	10L (v/h)	15L (v/h)	25L (v/h)	35L (v/h)
Length	442/450	562/570	513/831	655/655
Width	290/320	290/320	367/320	367/367
Depth	290/320	290/320	367/320	367/367

All Models Available in

Dimensions (in mm)



White with **Grey Domes**



Ivory with Sandy Domes

INSTALLATIÆN + PIPES

Titanium Plus

high durability and superior pressure withstanding capacity.

+ PIPES

5-Star (All Vertical Models).

4-Star - 6L / 10L (All Horizontal Models)

Warranty Product

Inner Tank

Heating Element

CDR Swift

Model Type

Hard water compliance

Capacity **Power Supply** Wattage (kW)

Max, Rate Pressure (Bar) Installation Type

Dimensions (in mm)

CDR Swift Storage

With enhanced titanium coating

6L | 10L

230 Volts AC, 50 Hz. Single Phase

3kW

Vertical / Horizontal Wall Mounting (Loft Friendly)

Capacity	6L (v/h)	10L (v/h)
Length	394/394	442/450
Width	290/290	290/320
Depth	290/290	290/320

All Models Available in

White with Grey Domes

33%** Faster Heating The high power 3kW heating element ensures you get hot water

2vrs.

2yrs.

5yrs.

INSTANT WATER HEATER RANGE





vvarranty	Scott Salmon
Product	2yrs.
Heating Element	2yrs.
Inner Tank	5yrs.

5-Star - 6L

Pronto Stylo / Neo / DN#

Model Tvpe Instant | Storage Capacity 1L | 3L | 6L

Power Supply Wattage (kW)

Max. Rate Pressure (Bar)

Installation Type

Dimensions (in mm)

All Models Available in*

Pronto Stylo / Neo / DN

230 Volts AC, 50 Hz. Single Phase 3kW (1/3/6 L) | 4.5kW (1/3 L)

Vertical Wall Mounting

Capacity	1L	3L	6L
Length	281	335	428
Width	175	209	270
Depth	172	205	253

White

Ivory



White Body with Grey Panel

Faster Heating Element

High powered heating element that provides hot water instantaneously.

^{**33%} Faster Heating as compared to a regular 2 kW heating element.

[#]Also available in Duronox variant of Pronto Neo and Stylo in 3 Litre 3kW for enhanced tank protection from hard water.

^{*}Pronto Stylo available only in white body with grey panel.

ONLINE INSTANTANEOUS WATER HEATER RANGE



INSTALLATI**∰**N



Warranty

Product

Aures Pro

34.7 @ 400V

50°C

Model Aures Pro 24kW Type Online Instantaneous 415 Volts AC, 50 Hz. 3 Phase **Power Supply**

Wattage/Step Power (kW) Max. Rate Pressure (Bar) 10

Ampere

Max. Working Temp.

Wire Thickness

400V 6Sq.mm 5 core

Dimensions (in mm)


Length	356
Width	526
Depth	138

Black

All Models Available in

Consistent Warmth With the new digital control, enjoy uninterrupted hot water at consistent temperature every day.

2yrs.



Model Type **Power Supply**

Wattage (kW)

Modes

Max. Rate Pressure (Bar) Ampere

Max. Working Temp. Wire Thickness

Dimensions (in mm)

Aures Multi 7.6kW Online Instantaneous

220-230 Volts AC, 50/60 Hz. Single Phase

7.6kW Available in three modes as per your needs.

6 Sq mm Length 178 Width 304 Depth 103

All Models Available in



33 @ 230V

55°C

White body with black panel

Warranty

Product	2yrs.
---------	-------

Lightning Fast Heating

High powered heating element that provides hot water instantaneously.

^{*}Pre Installation inspection is recommended.

INSTANTANEOUS GAS WATER HEATER RANGE





Model Type **Power Supply**

Modes

Aures Multi 5.5kW Online Instantaneous

230 Volts AC, 50 Hz. Single Phase

Wattage (kW) 5.5 kW

Available in three modes as per your needs.

178

304

98

Max. Rate Pressure (Bar)

23.9 @ 230V Ampere

Max. Working Temp. 50°C

Wire Thickness

230V 4 Sq mm 3 core

Length Dimensions (in mm) Width

Depth

All Models Available in

White

Lightning Fast Heating High powered heating element that provides hot water instantaneously.



2yrs.

Warranty

Warranty

Product

Product	2yrs.

ODS-ECO+

Model LPG Type Instantaneous 6 LPM Capacity 3V DC **Power Supply**

Heat Input (kW) 12kW Max. Rate Pressure (Bar)

Modes Available in three modes as per your needs.

Installation Type Vertical Wall Mounting

Length 440 Dimensions (in mm) Width 300

All Models Available in

White

133

Depth

Digital Display with ODS

Sleek display panel for temperature reading.

INSTANTANEOUS GAS WATER HEATER RANGE



Warranty

Product	2yrs.

ODS-ECO

ModelLPG | PNGTypeInstantaneousCapacity6 LPMPower Supply3V DCHeat Input (kW)12kWMax. Rate Pressure (Bar)8

Modes Available in three modes as per your needs.

Installation Type Vertical Wall Mounting

 Length
 440

 Width
 300

 Depth
 133

All Models Available in

White

ODS (Oxygen Depleting Sensor) With 2X SafetyTo ensure ventilation and to avoid any hazard for maximum safety.



Warranty

Product 2yrs.

ECO

Model LPG | PNG Instantaneous
Capacity 6 LPM
Power Supply 3V DC
Heat Input (kW) 12kW
Max. Rate Pressure (Bar) 8
Modes Available in three modes as per your needs.

Installation Type Vertical Wall Mounting

vertical vial modular

 Length
 440

 Width
 300

 Depth
 133

White

All Models Available in

Dimensions (in mm)

 \bigcirc

Double Solenoid Valve

Advanced safety feature with two solenoid valves to deliver double safety and complete peace of mind.

DOMESTIC SOLAR WATER HEATER RANGE



Warranty

Accessory	1yr.
Tank	5yrs.
Collector	7yrs.

Omega Max 8

Model Type Capacity Outer Body Max. Rate Pressure (Bar) Safety Valve Omega Max 8 Solar

100 LPD | 200 LPD | 250 LPD | 300 LPD | 500 LPD

Zinc Aluminium Sheet

100 to 300L – 8 bar & 500L - 4.5 bar Italian- 4 in 1 Multifunctional Safety Valve

Capacity	100	200	250	300	500
Base Length	2400/2200	2400/2200	2400/2200	2400/2200	2400/2200
Base Width	1316	2420	2465	3520	4620
Height	1625/1900	1625/1900	1625/1900	1725/2000	1725/2000
Tank Length	1055	1830	2200	1660	2850

Dimensions (in mm)

All Models Available in



Body Zn finish with black domes

Max Pressure

High pressure withstanding capacity (up to 8 bar) makes it suitable for pressurised applications.

DOMESTIC SOLAR WATER HEATER RANGE





Warranty

Accessory	1yr.
Tank	5yrs.

Alpha Plus

Model Type Alpha Plus Solar

Capacity
No. of Tubes

126 LPD | 189 LPD | 252 LPD | 315 LPD | 378 LPD

No. of Tubes Tube Length 10 | 15 | 20 | 25 | 30 1800 mm

Outer Body

Dimensions

(in mm)

Zinc Aluminium Sheet

System Capacity	120	109	232	راد	
Base Length	1965	1965	1965	1965	
Base Width	812	1212	1612	2012	
Height	1150	1150	1150	1150	Г
Tank Length	1008	1448	1888	2328	Г

Sustam Canacity 126 189 252 315

*The system capacity mentioned is including Tank + Tube

378 1965 2412

1150

2768

All Models Available in



Body Zn finish with black domes

INOX

Specially treated inner container ensures durability and resistance against corrosion.



Warranty

Accessory	1yr.
Tank	5yrs.

Alpha Pro

Model Alpha Pro Type Solar

Capacity No. of Tubes Tube Length

Dimensions (in mm)

126 LPD | 189 LPD | 252 LPD | 315 LPD | 378 LPD 10 | 15 | 20 | 25 | 30

1800 mm

Outer Body Zinc Aluminium Sheet

189 252 315 378 **System Capacity** 126 **Base Length** 1965 1965 1965 1965 1965 **Base Width** 812 1212 1612 2012 2412 Height 1150 1150 1150 1150 1150 Tank Length 1197 1597 2097 2647 3047

*The system capacity mentioned is including Tank + Tube

All Models
Available in

Body Zn finish with black domes

Smart Float

A unique float valve only offered by Racold, that eliminates long air vents to ensure safe usage, particularly in highwind velocity areas.

DOMESTIC HEAT PUMP WATER HEATER



Warranty

Compressor and Tank

Product

Domestic Heat Pump 300 L

Model
Product Configuration
Capacity

CoP
Heating Element (kW)
Max. Rate Pressure (Bar)
Refrigerant

Noise Level (DB)

Dimensions (in mm

Domestic Heat Pump Split 300 L 4.25 1 & 1.5 8 R134a 52

 Capacity
 300 L

 Height
 1491

 Width
 650

White

All models available in

70% Energy Savings**

It uses electricity only to move heat from one place to another and not to generate heat, using 70% less electricity compared to conventional water heating solutions.

Heat pump water heaters have a COP (Co-efficient of performance) of 4.25, meaning that the energy produced in the form of hot water is 4.25 times more than that is consumed.

In comparison with electric water heater the annual saving is ~₹10,000/-

^Savings are calculated @ ₹10 per unit, subject to internal lab test conditions.

2yrs.

5yrs.

Warranty

Product	2yrs.
Compressor and Tank	5yrs.

Domestic Heat Pump 150 & 200 L

Model
Product Configuration
Capacity
CoP
Heating Element (kW)
Max. Rate Pressure (Bar)
Refrigerant

Noise Level (DB)

Dimensions (in mm)

-,

All models available in

Domestic Heat Pump Split 150L & 200L

3.8 1.8

8 R134a 52

 Capacity
 150 L
 200 L

 Height
 1486
 1894

 Width
 495
 510

White

70% Energy Savings**

It uses electricity only to move heat from one place to another and not to generate heat, using 70% less electricity compared to conventional water heating solutions.

Heat pump water heaters have a COP (Co-efficient of performance) of 3.8, meaning that the energy produced in the form of hot water is 3.8 times more than that is consumed.

In comparison with electric water heater the annual saving is ~₹10 0,00/-

[^]Savings are calculated @ ₹10 per unit, subject to internal lab test conditions.

COMMERCIAL SOLAR WATER HEATER RANGE

End-to-end technologically advanced hot water solutions for all types of commercial and hybrid applications. We have successful implementations across Residential, Hospitality, Medical & Healthcare, Educational Institutes and Industrial Sectors. Applications range from hot water for bathing, laundry, swimming pool, medical equipment, cleaning, industrial cleaning and much more.



COMMERCIAL HEAT PUMP

Our heat pump water heating solutions save upto 70%* electricity compared to conventional water heating solution. Commercial Heat Pump Water Heaters are available from 125L per hour (6kW) to 1000L per hour (44kW) output capacities.



CHOOSE THE BEST WATER HEATER

PRODUCT COMPARISON		STORAGE			
		Omnis Wi-fi	Omnis Lux	Omnis Lux Plus	
Benefits	Key Features		-		
	Double Level Thermostat	✓	✓	✓	
	Safety Valve	MFV	MFV	MFV	
Safety	Auto Diagnosis	✓	✓	✓	
	Anti Scalding	✓	✓	✓	
	Titanium Enamel HE	✓	√	✓	
Durability	Titanium Plus Coating	✓	√	√	
	Magnesium Anode	✓	✓	✓	
	Temperature Indicator	✓	✓	✓	
	Shower Ready	✓	√	√	
	IOT Enabled Wi-Fi	✓			
	Usage Scheduler	√	✓	✓	
	Power Consumption Indicator	✓			
Convenience	Remote Plus Control (By App)	✓			
	Quick Function		✓	✓	
	Eco Function	✓	✓	✓	
	Smart Bath Logic	✓	✓	✓	
	Temp. Regulation Knob	✓	✓	✓	
	Colour Options				
Aesthetics	Body Finish	Matt	Matt	Matt	
	Design Type	Square	Square	Square	
	Capacity (Ltr.)	15/25	10/15/25	10/15/25	
Range	Power (kW)	2	2	2	
	Length	360/447	360/360/447	360/360/447	
Dimensions	Width	360/447	360/360/447	360/360/447	
(in mm)	Depth	324/386	276/324/386	276/324/386	
	Product	2	2	2	
Warranty*	Heating Element	4	4	4	
(in years)	Tank	7	7	7	
	STAR Rating	5 Star - 25Ltr 4 Star - 15Ltr	5 Star - 25Ltr 4 Star - 15Ltr 4 Star - 10Ltr	5 Star-25Ltr 4 Star-15Ltr 4 Star-10Ltr	
Doufor	Max. Operating Pressure (Bar)	8	8	8	
Performance	Flexomix Technology	√	√	✓	
	Silver Ion Technology			✓	

FROM RACOLD'S LATEST RANGE

		STORAGE		
Andris Uno	Andris Lux Plus	CDR Dix Plus	CDR Dlx Vertical	CDR Dlx Horizontal
✓	✓	✓	✓	✓
MFV	MFV	MFV	MFV	MFV
Copper HE	✓	Copper HE	Copper HE	Copper HE
✓	~	✓	✓	√
✓	✓	✓	✓	✓
Heating Indicator	Heating Indicator	Heating Indicator	Heating Indicator	Heating Indicator
√	√	√	√	√
Glossy	Glossy	Glossy	Glossy	Glossy
Square	Square	Cylindrical	Cylindrical	Cylindrical
10/15/25	10/15/25	10/15/25/35	10/15/25/35	10/15/25/35
2	2	2	2	2
360/360/447	360/360/447	442/562/513/655	442/562/513/655	450/570/831/655
360/360/447	360/360/447	290/290/367/367	290/290/367/367	320/320/320/367
278/326/390	298/346/410	303/303/380/380	290/290/367/367	320/320/320/367
2	2	2	2	2
3	3	2	2	2
7	7	7	5	5
5 Star-25Ltr 4 Star-15Ltr 4 Star-10Ltr	5 Star-25Ltr 4 Star-15Ltr 4 Star-10Ltr	5 Star	5 Star	4 Star - 15/25Ltr 3 Star - 10/35Ltr
8	8	8	8	8
√	✓	✓	✓	✓
	✓			

CHOOSE THE BEST WATER HEATER

Safety Dou Safety Aut Ant Tita Durability Tita Mar LED Sho	ey Features Duble Level Thermostat Ifety Valve Into Diagnosis Inti Scalding Itanium Enamel HE Itanium Plus Coating Itanium Anode D Temp Indicator Indicator Indicator Indicator Indicator Indicator Indicator	CDR Swift - Vertical	CDR Swift - Horizontal	Platinum Plus
Safety Doc Safety Aut Ant Tita Mark LED Sho	ouble Level Thermostat fety Valve Into Diagnosis Inti Scalding Itanium Enamel HE Itanium Plus Coating Itanium Anode D Temp Indicator	Copper HE ✓	Copper HE ✓	Copper HE ✓
Safety Aut Ant Durability Tita Ma LED Sho	fety Valve uto Diagnosis nti Scalding tanium Enamel HE tanium Plus Coating agnesium Anode D Temp Indicator	Copper HE ✓	Copper HE ✓	Copper HE ✓
Safety Aut Ant Tita Durability Tita Ma LED Sho	ato Diagnosis Iti Scalding Itanium Enamel HE Itanium Plus Coating Itanium Anode D Temp Indicator	Copper HE ✓	Copper HE ✓	Copper HE ✓
Aut Ant Tita Durability Tita Ma LED Sho	nti Scalding tanium Enamel HE tanium Plus Coating agnesium Anode D Temp Indicator	✓ ✓	✓	✓
Durability Tita Ma LED Sho	tanium Enamel HE tanium Plus Coating agnesium Anode D Temp Indicator	✓ ✓	✓	✓
Durability Tita Ma LED Sho	tanium Plus Coating agnesium Anode D Temp Indicator	✓ ✓	✓	✓
Ma- LED Sho	agnesium Anode D Temp Indicator	✓		
LED	D Temp Indicator		✓	
Sho	-	Heating Indicator		✓
<u> </u>	ower Ready	J	Heating Indicator	Heating Indicator
		√	✓ ·	✓
ІОТ	T Enabled Wi-Fi			
Usa	age Scheduler			
	wer Consumption Indicator			
Convenience Ren	mote Plus Control (By App)			
Qui	uick Function			
Eco	o Function			
Sma	nart Bath Logic			
Tem	mp. Regulation Knob			✓
Cole	lour Options			
Aesthetics Boo	ody Finish	Glossy	Glossy	Glossy
Des	esign Type	Cylindrical	Cylindrical	Prismatic
	pacity (Ltr <u>.</u>)	6/10	6/10	50/100
Range	ower (kW)	3	3	3
Len	ngth	394/442	394/450	613/993
	idth	290/290	290/320	493/493
(in mm) Dep	epth	290/290	290/320	499/499
Pro	oduct	2	2	2
	eating Element	2	2	3
(in years)	nk	5	5	7
STA	AR Rating	5 Star	4 Star	5 Star
	ax Operating Pressure (Bar)	8	8	8
Performance Flex	exomix Technology	✓	✓	✓
Silv	ver Ion Technology			

FROM RACOLD'S LATEST RANGE

STORAGE	INS	SLIM STORAGE	
Platinum Eco	Pronto Stylo / DN#	Pronto Neo / DN#	Andris Slim
✓	✓	✓	✓
MFV	PRV	PRV	MFV
Copper HE	Copper HE	Copper HE	Copper HE
✓	✓	✓	✓
✓	✓	√**	✓
Heating Indicator	Heating Indicator	Heating Indicator	Heating Indicator
✓	✓	✓	✓
Glossy	Glossy	Glossy	Glossy
Cylindrical	Prismatic	Prismatic	Horizontal Slim
50/70	1/3/6	1/3/6	20/30**
3	3/4.5*	3/4.5*	2.5
560/760	281/335/428	281/335/428	700/754
470/470	175/209/270	175/209/270	280/335
485/485	172/205/253	172/205/253	302/340
2	2	2	2
3	2	2	3
7	5	5	7
		-	
4 Star	5 Star (6Ltr)	5 Star (6Ltr)	4 Star
8	6.5	6.5	8
✓ ·	√ √	√ v	√ ·
			· · · · · · · · · · · · · · · · · · ·
	*4.5kW only for 1/3 ltr.		**Star label obtained as per BEE guidelines
	*Pronto Neo and Stylo have a variant in 3 Litre 3 **Applicable in Pronto Neo/Stylo/DN Products.	kw with duronox passivation in tank.	**Star label obtained as per BEE guidelines considering 15Ltr and 25Ltr capacities for 20Ltr and 30Ltr products respectively.



Reborn Everyday With Hot Water









Winner of Good Design Award



© 73628 88999

L 1860-425-2288

www.racold.com



MARKETED BY: ARISTON THERMO INDIA PRIVATE LIMITED

Office No: 103, 1st Floor, Mayfair Tower, Wakdewadi, Shivaji Nagar, Pune - 411005, Maharashtra.

Customer Care Details

Email: customer.care@racold.com | Customer Care No: 1860 425 2288 / 8600 25 6000. Address: Same as marketed by.

Disclaimer:

- 'Racold' brand is a registered trademark of Ariston Group.
- Any dispute shall be subject to the exclusive jurisdiction of Pune Courts.
- · Always use genuine Racold spare parts and connecting pipes.
- Always get your installation done by authorized Racold Service center only.
- Star rating obtained as per BEE guidelines.
- Star label obtained as per BEE guidelines considering 15 Ltr and 25 Ltr capacities for 20 Ltr and 30 Ltr products respectively.
- The images are for representative purposes and the actual product may vary.
- Specifications are subject to change without prior notice.
- ^Savings are calculated @ ₹10 per unit, subject to internal lab test conditions.
- Subject to internal lab test conditions.